

Braime Elevator Components newsletter

Summer 2011




New CATALOGUES now available:

- Elevator Buckets
- Forged Chains
- Electronics







Order your copy now

4b-uk@go4b.com

PRODUCT NEWS: RLI "Shaker"

The RLI "Shaker" rotary paddle switch is used to detect high / low levels of bulk granular solids in bins, tanks and silos. It can also be used to detect plug conditions in spouts, where long life and failsafe detection is required.

Utilizing a unique stepper motor drive, the RLI "Shaker" rotates clockwise, then counter-clockwise and then shakes to shed any excess material build up. If the paddle rotation is impeded at any time by the bulk material then the electronic circuit provides a signal for level indication or control.



The RLI "Shaker" uses fewer mechanical parts compared with standard rotary level indicators. No gearbox or clutch is required as the stepper motor drive is directly coupled to the output shaft and is practically indestructible and cannot be damaged by forced or backwards rotation. Also, an adjustable torque control allows one unit to cover many different densities of material, and provides easy on site calibration without having to change paddles.

Visit 4B's website





Braime Elevator Components **newsletter**Summer 2011




Choosing the Right Hazard Monitoring System

When 4B introduced their Watchdog Elite bucket elevator monitoring system in the early 1980's, we were the first on the market to offer a system that could monitor a complete bucket elevator or conveyor system. No more need to monitor different hazards separately. - Taking the hassle out of hazard monitoring, the Watchdog Elite has quickly established itself as the industry reference in hazard monitoring.

Today, there are a number of systems on the market, and customers may find it more difficult to establish which system is best for them. When you add up all the additional costs of adding sensors and servicing the system, then this decision becomes even more complicated. And when you consider the cost of the potential downtime and even damage, then it is absolutely crucial to get this decision right!

So what should customers look out for when selecting a system to monitor their bucket elevators and conveyors?

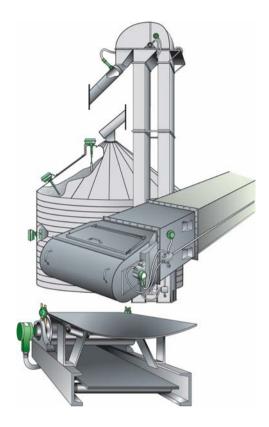

Firstly, scalability:

Make sure that the system is able to grow with your operations. You might just want to monitor one elevator, for a start, but what happens if you want to monitor an additional elevator, or if you want to add more sensors to the monitoring system?

Secondly, sensor options and interfaces:

What hazards is the system able to monitor? Belt and pulley misalignment? Underspeed & Overspeed? Belt slippage? Blocked chute condition? Bearing temperature? – And what is the choice of compatible sensors? Do you have to use the supplier's range of sensors, and are they up for the job? Does it have a communication interface, to be connected to a PLC or PC?

Thirdly, user friendliness and support:

How easy is the system to use for the people who have to operate it? Is there an in-built test and diagnostic function? And how are potential hazards displayed and identified? Is there a well-documented instruction manual available? Does the supplier offer a commissioning service? And what level of support can you expect, if there is a problem?

Fourthly, compliance:

Does the system have the necessary hazardous area approvals for the region where it is to be used: ATEX for Europe, CSA for North America & Canada and IECEx for the rest of the world?

At 4B, 25 years of experience have shown that there is no "one size fits all" hazard monitoring system. The 4B approach to product development is very much bottom-up through discussions with the end-user upwards, rather than sales-driven.

And it is this industry driven approach to product development that has led the engineering team to develop 2 distinctive multi-function hazard monitoring systems, each of them well researched and tested and using the same high quality components, but different in the variety of sensor options and the scope of the applications they can cover.



Braime Elevator Components newsletter Summer 2011



The T500 Elite Hotbus System

This is 4B's top of the range system, able to monitor entire plants where the bucket elevators and conveyors being monitored are spread out across large distances. A multi-function hazard monitor, it can monitor belt speed/alignment, bearing temperature, pulley alignment and plug condition. It has been designed as a serial communication system, to monitor up to 256 sensors, with a scan time of only 4 seconds! With automatic machine shutdown capability and PLC / PC compatibility, this advanced microprocessor based system offers low cost installation, versatility and easy system expansion. Logging and trending software is also available for historic data analysis and preventative and predictive machine maintenance. It is ATEX, CSA and IECEx certified.

The Watchdog Elite System

A well proven multi-functional hazard monitor for bucket elevators and conveyors, the Watchdog Elite has recently been relaunched with continuous bearing temperature monitoring.

The Watchdog Elite allows complete monitoring of multiple hazards in a bucket elevator or conveyor, including belt and pulley alignment (top and bottom), bearing temperature, belt speed and blocked chute conditions.

The Watchdog Elite system uses a range of compatible sensors to monitor different hazards, such as the belt misalignment sensors "Touchswitch", BAP2" and WDA3", the WDB bearing temperature sensors and the "Binswitch" capacitive sensor.

An LCD screen displays elevator status messages (available in four different languages) and a superbright LED screen displays belt speed. RS485 communication is also available for connection to plant computers / PLCs. Calibration and parameter adjustment are all menu-driven and kept simple.

The system is ATEX, CSA and IECEx certified.

	T500 Elite	Watchdog Elite
	T500 err manne. elite Posterior proprieta de la companya de la co	WATCH DOG
Bearing temperature	√ (continuous) max. 256 sensors*	√ (continuous) max. 6 sensors
Belt speed	(continuous) max. 256 sensors*	(continuous) max. 1 sensor
Belt alignment	√ max. 256 sensors*	√ max. 4 sensors (Touchswitch)
Plugged condition	✓	✓
Communication interfaces	RS485 API	RS485 API
Test function	✓	✓
Alarm & shutdown function	√	✓
Logging & trending software	✓	√
Applications	Multiple elevators & conveyors; remote monitoring across site	Several elevators & conveyors
Certifications	ATEX CSA IECEx	ATEX CSA IECEx

^{*} total number of sensors, all sensors combined

4B has an extensive range of CSA / ATEX / IECEx approved sensors that work with these control units, including bearing temperature sensors, speed sensors, misalignment switches, level indicators and choke switches. The range is constantly evolving to offer customers the best technical standard.

4B's technical team can recommend the ideal combination of sensors and monitoring systems to suit their customers' requirements and budget. They can also offer a scalable solution starting with carefully chosen equipment and systems that can be expanded at a later date to encompass other machines in the plant.

4B also offers a commissioning service as well as a competent after-sales technical service to help customers overcome any technical problems with their monitoring equipment.



Braime Elevator Components newsletter Summer 2011

NEW PRODUCT: Atlas AM Elevator Bucket

The new heavy duty Atlas AM Nyrim bucket is made of antistatic material and has excellent surface resistivity dissipating properties, making it ideal for ATEX applications. The bucket's non-stick properties are enhanced by its smooth surface finish and open design.

The Atlas AM is a very tough, long life elevator bucket with ultra heavy duty design and construction; the material makes this bucket up to 6 times stronger than other industrial elevator buckets.

A very versatile elevator bucket, the Atlas AM is suitable for heavy industrial applications as well as grain and sticky materials.



New 4B subsidiary in Australia



We are proud to announce that we have just created a new operation especially for the Australian market. 4B Australia Pty Ltd, located in Brisbane, was officially incorporated on 1st December 2010 and is now fully operational, under the leadership of Managing Director Paul Dennis, former Product Development Manager at Fenner Dunlop Conveyor Services.

4B Australia has been created owing to the importance of the region in 4B's growth plans. 4B Braime has been serving customers in the area for many years, and 4B components have become an integral part of many processing facilities.

With its local presence in Australia, 4B Braime is aiming to provide a first class technical support and after sales service to its local customer base, a service which we feel is vital, particularly for our electronics range.

4B Australia will be selling the complete range of 4B products, including elevator buckets, belts and bolts, forged conveyor chain, and electronic monitoring components





After spending over twenty years in the conveyor belt service and supply industry and the last five specifically with bucket elevator products. The decision for me to help establish the 4B Braime Components Ltd, Australian subsidiary was

The 4B range of products have been in the Australian market for many years and are highly respected. So I was more than happy to accept the opportunity of being part of a very successful business.

While there is a lot of hard work ahead with setting up a new business. I am really looking forward to getting out and meeting our new and all of our existing customers in the months ahead.