

Radio Frequency (RF) Capacitance Point Level Indicator

APPLICATION

The Auto-Set series RF capacitance point level monitors are used for detecting high, intermediate, or low levels of liquids, powders and free flowing granular solids stored in tanks, bins, silos or other containers.

METHOD OF OPERATION

The Auto-Set series incorporates simple push-button calibration with microprocessor enable/disable switch for total protection of stored values. Once the Auto-Set is calibrated for the application it never has to be re-calibrated. Data is stored in non-volatile memory so it is not affected by power loss.

A four digit LED display shows set values for uncovered, covered and trip settings, allowing simple set-up and adjustment. A set of voltage-free changeover relay contacts are actuated when the level of the material in the container reaches the probe. The unit incorporates a unique power shield which automatically compensates for material build-up around the probe and on the sides of the container, preventing false indication. The solid state electronics are housed in a weatherproof, flame retardant, glass-reinforced nylon enclosure.

The Auto-Set series can be top or side mounted, and are available with 100mm, 200mm, 1m, or 2m 316 solid stainless steel probes. For applications up to 10m long (maximum), 304 stainless steel wire is used to extend the probe length. The Auto-Set can be used with container walls up to 270mm thick.

FEATURES


- ▶ High and Low Level Fail Safe Indication
- ▶ Multi-Voltage (110/240 VAC or 24 VDC)
- ▶ Push Button Calibration
- ▶ Digital Display & Internal Timer
- ▶ 100mm to 10m Probe Lengths
- ▶ Power Shield Compensates for Material Build-Up on Probe
- ▶ Remote Models for High Temperature or Vibration Areas
- ▶ Flush Probe Version for Close Fitting Applications

PART NUMBERS/ACCESSORIES

- ▶ ATSP6V0A Auto-Set - Walls Up To 75mm Thick
- ▶ ATSP6V0A-300 Auto-Set - Walls 75 to 270mm Thick
- ▶ ATSP10 316 Stainless Steel Probe, 100mm Length
- ▶ ATSP11 316 Stainless Steel Probe, 200mm Length
- ▶ ATSP12 316 Stainless Steel Probe, 1m Length
- ▶ ATSP13 316 Stainless Steel Probe, 2m Length
- ▶ ATSWP11 316 Stainless Steel Probe wire probe, 10m Length, can be cut to length required
- ▶ SMP Mounting Plate (Stainless Available)




Auto-Set™

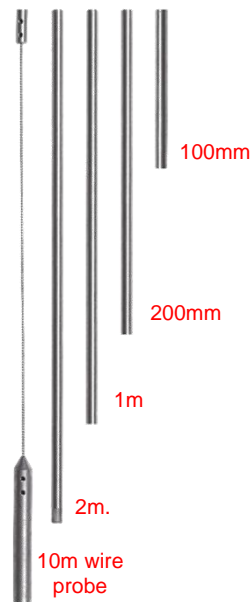
 SMP
Mounting
Plate


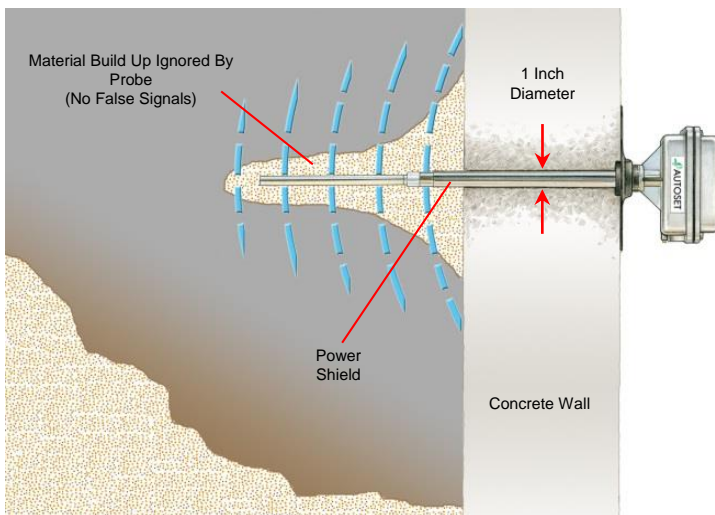
ATEX Approved

Please refer to instruction manual for correct installation.
Information subject to change or correction. Jan 2018


Detailed specification, wiring diagrams and installation/operating instructions available upon request.

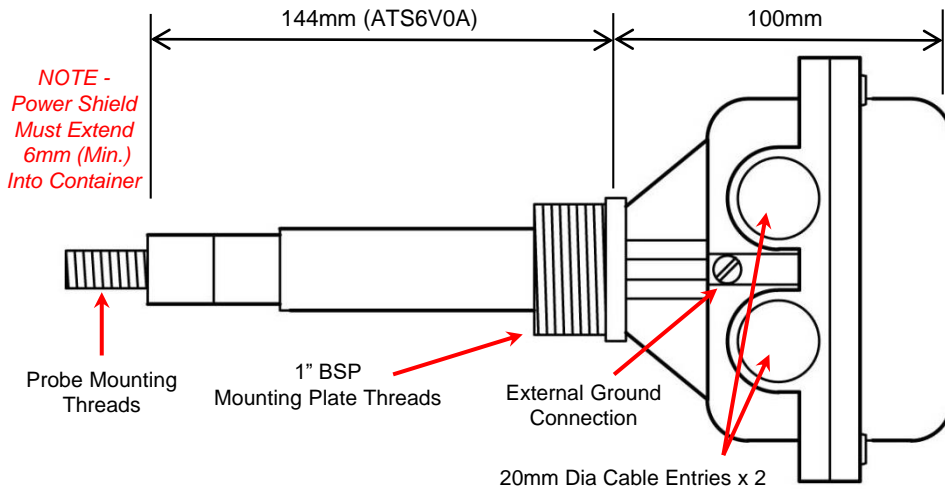

POWER SHIELD OVERVIEW




The power shield creates a barrier and enables the unit to ignore material built up on the probe, preventing false readings. Installation through thick concrete silos only requires a one inch diameter hole for probe insertion.

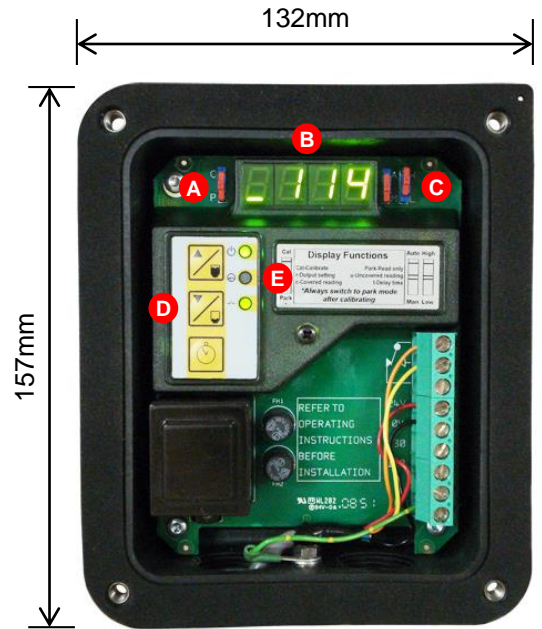

- A - Calibrate / Park Switch
- B - LED Display
- C - Auto / Manual Calibration Switch
High / Low Failsafe Switch
- D - Sensitivity and Timer Buttons
- E - Power, Calibrating & Output LEDs

OTHER MODELS AVAILABLE

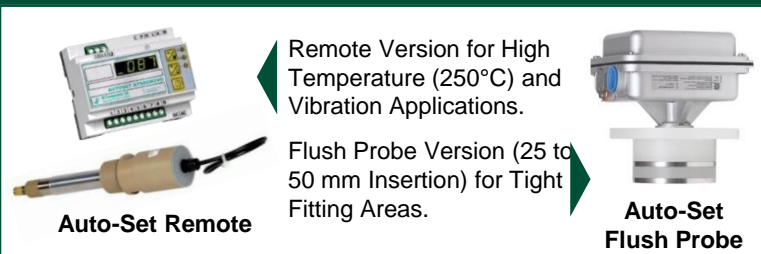

Auto-Set Remote

Remote Version for High Temperature (250°C) and Vibration Applications.

Flush Probe Version (25 to 50 mm Insertion) for Tight Fitting Areas.

Auto-Set Flush Probe

Please refer to instruction manual for correct installation. Information subject to change or correction. Jan 2018

TECHNICAL SPECIFICATIONS
Auto-Set™ RF Capacitance Point Level Indicator

MODELS: ATS6V0A, ATS6V0A-300	
Power Supply:	120/240 VAC or 24 VDC (Universal Supply)
Operating Temperature:	-20°C to +50°C
Sensitivity:	0.5 Pico Farad
Output:	1 Set of Voltage-Free Changeover Relay Contacts
Fail Safe (Selectable):	Low Level (Energized When Covered) High Level (Energized When Uncovered)
Calibration:	Push Button (With or Without Material)
LED Display:	Measured Values (Covered, Uncovered, Trip)
LED Indicator:	Material Detection
Time Delay:	0 - 60 Seconds
Power Shield:	Request Autocad Drawing
Probes:	Stainless Steel (100mm to 10m)
Conduit Entry:	1" BSP
Enclosure	Flame Retardant, Glass Reinforced Nylon
Protection:	IP65, NEMA 4
Approvals:	ATEX and IECEx Zone 20