



ELECTRONIC COMPONENTS & MONITORING SYSTEMS



4B GROUP

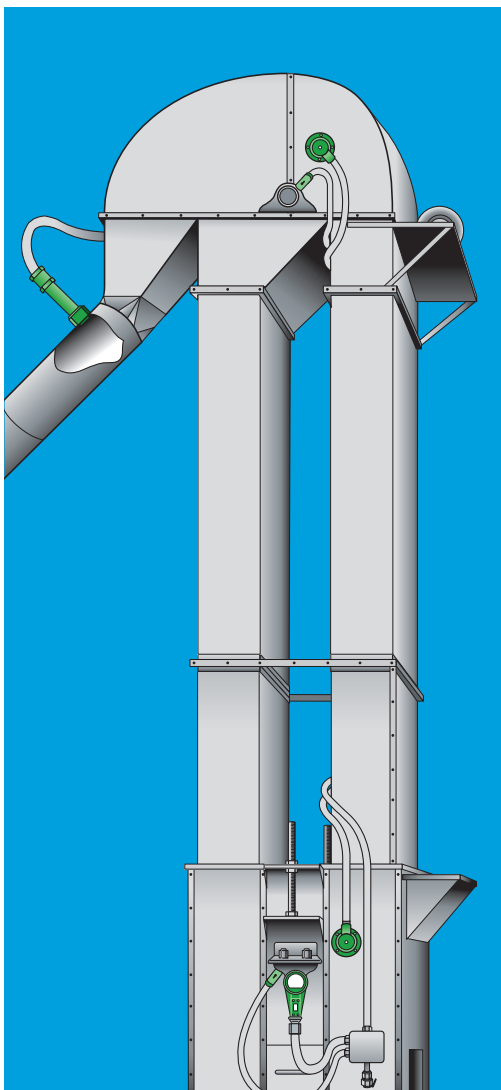

A Worldwide Manufacturer of
High Quality, Technologically Advanced
Material Handling & Electronic Components

BETTER BY DESIGN

4B - HAZARD MONITORING & EXPLOSION PREVENTION

Preventative maintenance can help reduce the risk of equipment failure and consequent downtimes. When it comes to monitoring your bucket elevators and belt conveyors, 4B can recommend you the ideal combination of sensors and monitoring systems to suit your requirements and budget.

4B provides an extensive range of their own ATEX / IECEx / CSA / CCC / EAC approved hazard monitoring systems, misalignment switches and bearing temperature monitors and level controls. We can offer you anything from a replacement sensor to a fully integrated hazard monitoring system which can be operated either as a stand-alone system or connected to your PLC.

We can offer you a scalable solution starting with correctly chosen equipment and systems that can be expanded at a later date to encompass other machines in the plant.


4B provides installation service and after-sales technical support to help you overcome any technical problems with your monitoring equipment.

To learn more about the services and products we offer, please visit www.go4b.com



SENSOR APPLICATIONS

These illustrations show typical sensor placements for monitoring: speed, motion, bearing & surface temperature, belt alignment, level / plug indication and slack chain detection.

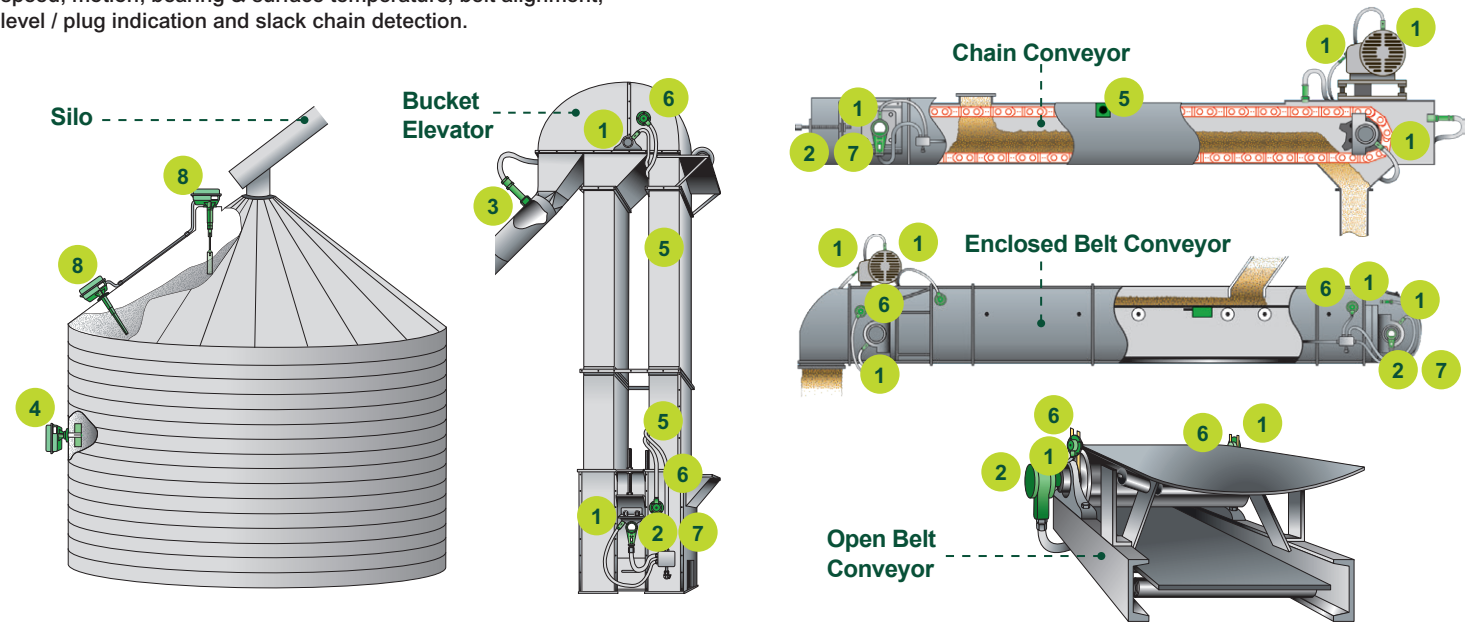

CONTENTS



COMBINED HAZARD MONITORING SYSTEMS
Watchdog Super Elite, T500 Elite, IE-NODE

Page 5-6



BEARING TEMPERATURE MONITORS
T400 Elite, T400N Elite

Page 8



BELT ALIGNMENT MONITORS
B400 Elite, A400 Elite

Page 9



MISALIGNMENT SENSORS FOR BUCKET ELEVATORS
Touchswitch, WDA, BAP

Page 10



MISALIGNMENT SENSORS & SAFETY SWITCHES FOR BELT CONVEYORS
Bulldog, Pullswitch

Page 11



SPEED SWITCHES
M100, M300, M800, Millispeed

Page 12-13



INDUCTIVE SENSORS
P100, P300, Whirligig

Page 14




ENCODERS
Shaft Encoders, Wheel Encoder

Page 15



BEARING TEMPERATURE SENSORS
ADB, Millitemp, WDB8, MDB, WDB7

Page 16-17



LEVEL INDICATORS
Auto-Set™, Binswitch, RLI, RG

Page 18-19



JUNCTION BOXES

Page 20



BROKEN OR SLACK CHAIN DETECTION

Page 21

SENSORS

1 BEARING TEMPERATURE SENSORS

The ADB, MDB, and WDB Series bearing temperature sensors are designed to screw directly into an existing grease zerk fitting on a bearing housing. Each sensor is fitted with a grease nipple to allow lubrication of the bearing without the need for removal of the sensor. Most series are available with either a PTC thermistor with various factory set trip points, or a NTC thermistor with a user adjustable trip point, or as a Pt100 RTD version.

Page 16-17

2 SPEED SWITCHES

Monitors rotating machinery for dangerous underspeed conditions. An inductive sensing device located in the nose of the enclosure will detect a metal target. Set to the normal machine RPM, 4B Speedswitches provide alarm and shutdown signals underspeed and stopped motion.

Page 12-13

3 BINSWITCH

The Binswitch detects level or plug conditions for bulk granular solids in tanks, bins, or silos and can be used as a plug or choke detector in chutes, conveyors and elevator legs.

Page 19

4 ROTO LEVEL SERIES

The Roto Level Series are rotary paddle switches designed to detect high and low levels of bulk granular solids in bins, tanks, silos, and as blockage detectors in spouts.

Page 19

5 WDA 3

The WDA Series are non-contacting extended range magnetic sensors used to detect ferrous targets at a distance of up to 75mm from the sensor. They can be used on chain conveyors to detect slack or broken chain. They can also be used on bucket elevators where they can detect bucket bolts and steel buckets to monitor belt misalignment.

Page 10

6 TOUCHSWITCH

The Touchswitch is an electro-mechanical limit-switch style sensor with no moving parts. It is designed to detect belt tracking and misalignment problems on bucket elevators and conveyors. Unlike a rub block that utilises friction (heat) to activate, the Touchswitch is pressure sensitive for safer and more reliable monitoring.

Page 10

7 INDUCTIVE SENSORS




4B inductive proximity sensors are designed to detect shaft speed, shaft position, gate position, or object presence. No contact is made between the sensor and the target being monitored.

Page 14





8 AUTOSET SERIES

The Autoset Series are self-contained point level monitors with digital displays for high, intermediate, or low-level detection of liquids, powders or free-flowing granular solids. The Autoset Series incorporates simple push-button calibration with microprocessor enable/disable switch for total protection of stored values. Once the unit is calibrated for a specific application, it never has to be re-calibrated.



Page 18

COMBINED MONITORING SYSTEMS			
PRODUCT	WATCHDOG SUPER ELITE™	T500 ELITE - HOTBUS™	IE-NODE
	 Page 5	 Page 8	 Page 6
Bearing temperature	✓ (continuous) max. 6 sensors + 2 ambient temp. sensors	✓ (continuous) max. 256 inputs*	8 dual use inputs (contact or NTC temperature)
Belt speed	✓ (continuous) max. 2 inputs – Differential speed monitoring	✓ (continuous) max. 256 inputs*	2 pulse or 4-20mA
Belt alignment	✓ Pulses / Contact / Rub* Blocks 4 inputs	✓ max. 256 sensors*	8 dual use inputs (contact or NTC temperature)
Plugged condition	✓	✓	✓
Pulley alignment	✓	✓	✓
Communication interfaces	Ethernet with Modbus TCP protocol	All major industrial protocols supported via F500 Gateway	Ethernet IP, Profinet, Modbus TCP
Test function	✓	✓	✗
Alarm & shutdown function	✓	✓	✗
Applications	Single elevator or conveyor	Multiple elevators & conveyors; remote monitoring across site	Bucket elevators & conveyors, plant-wide monitoring
Hazardmon.com (Cloud based hazard monitoring)	✓ (Ethernet onboard)	✓ (via F500)	✓ (Ethernet onboard)
Certifications	UKEx / EAC / ATEX / CSA / IECEx / InMetro / Nepsi / CCC	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC

* total number of inputs / sensors, all sensors combined.

SPECIALISED MONITORING SYSTEMS				
PRODUCT	T400N ELITE	T400 ELITE	A400 ELITE	B400 ELITE
	 Page 10	 Page 10	 Page 11	 Page 11
Bearing temperature	✓ (continuous) max. 8 sensors	✓ (discreet PTC) max. 16 sensors	✗	✗
Belt speed	✗	✗	✓	✗
Belt alignment	✗	✗	✓	✓
Plugged condition	✗	✗	✗	✓
Pulley alignment	✗	✗	✗	✓
Communication interfaces	Modbus RTU (RS-485)	✗	✗	✗
Test function	✓	✓	✓	✓
Alarm & shutdown function	✓	✓	✓	✓
Applications	Elevator & conveyors	Elevator & conveyors	Elevators	Elevator & conveyors
Hazardmon.com (Cloud based hazard monitoring)	✗	✗	✗	✗
Certifications	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC	UKEx / ATEX / CSA / IECEx / InMetro / Nepsi / CCC

COMBINED MONITORING SYSTEMS



Combined belt speed, belt alignment, continuous bearing temperature, pulley alignment and plugged condition monitoring system

The **Watchdog Super Elite™** is a complete elevator and conveyor monitoring system with inputs for most of the types of sensors standard in the industry. Offers top-of-the-class flexibility and approvals. Unprecedented user friendliness via a 3.5" full colour bespoke design graphics screen. Controller settings can be set up either directly on the unit or via a PC application and transferred between the WDC4s and PC via a SD card. In-built Ethernet port with full support for the Hazardmon.com cloud based monitoring service. WDC4 has multi-lingual support. MODBUS/TCP Support with the application notes for Rockwell, Siemens and Mitsubishi PLCs is available.

Features

- Belt speed monitoring (single and differential speed)
- Belt alignment monitoring (contact, pulsed and rub blocks)
- Bearing temperature monitoring
- Pulley alignment monitoring
- Plug condition monitoring
- Acceleration monitoring
- Jog prevention
- 3.5" Colour graphics LCD display
- SD card for settings save / restore and firmware updates
- Ethernet RJ45 port
- Multi-lingual display
- Hazardmon.com support for real-time remote monitoring and historical analysis

Sensor options

- ADB, MDB, and WDB: bearing temperature
- WDA Series: motion alignment
- Touchswitch: belt alignment
- Inductive Proximity Sensors: speed (P1003V34AI / P3003V34AI)
- Binswitch: plugswitch

Approvals

- UK - UKEx
- Europe – ATEX
- USA, Canada – CSA
- Brazil - InMetro
- China - Nepsi / CCC
- Russia - EAC
- Worldwide – IECEx

Input supply voltage

- 100 to 240 VAC
- 24 VDC (universal supply)

Sensor supply


- 24 VDC

H x W x D


- 308 x 241 x 137mm

Applications





- Bucket elevators and conveyors



Powered by Hazardmon.com



For more detailed product information, please visit: www.go4b.com

WATCHDOG EXPANSION CARDS	
The Watchdog Super Elite comes with standard 15 sensor inputs. However, it can be extended to up to 27 via the use of expansion cards. Cards can be pre-installed at the factory when ordering a new Watchdog WDC4, or installed into existing control units already in the field.	
<div><h4>WDC4-AUXO-SSR</h4><ul style="list-style-type: none">4 x solid state alarm relay outputs for the following conditions:<ul style="list-style-type: none">➤ Speed➤ Temperature➤ Misalignment➤ Auxiliary Inputs</div>	<div><h4>WDC4-AUXI-6AN</h4><p>Additional analogue inputs:</p><ul style="list-style-type: none">➤ 4 x 4-20mA current loop inputs (0-20mA range supported)➤ 2 x 0-10VDC analogue inputs➤ Individually enabled and configured in WDC4</div>
<div><h4>WDC4-AUXI-6NTC</h4><p>Additional NTC type temperature inputs:</p><ul style="list-style-type: none">➤ 6 x NTC inputs➤ 2 x Sensor power supply (+24VDC)➤ Individually enabled and configured in WDC4</div>	<div><h4>WDC4-AUXI-4PT100</h4><p>Additional Pt-100 type temperature inputs:</p><ul style="list-style-type: none">➤ 4 x Pt-100 inputs➤ Temperature range: -200 to 535 degrees C➤ Three-wire configuration➤ Individually enabled and configured in WDC</div>



COMBINED MONITORING SYSTEMS

IE-NODE (INDUSTRIAL ETHERNET-NODE)



Remote Sensor
Monitoring for PLC's &
Automation Systems

The **Industrial Ethernet Node (IE-NODE)** is a remote monitoring interface designed to provide sensor data to PLC's or other automation and control systems. The IE-NODE is available in two versions, both with a total of 10 sensor inputs. Version 1 has 8 contact or NTC temperature inputs, and 2 pulse or 4-20 mA (current loop) inputs. Version 2 has 10 inputs for 4-20 mA (current loop) sensors. Both units can be expanded to 16 sensor inputs with the installation of optional expansion boards. The IE-NODE operates by reading its sensor inputs and sending processed data when requested by another system (e.g. PLC). The units are equipped with RJ45 Ethernet sockets and support PROFINET, EtherNet/IP and Modbus TCP/IP protocols for easy integration with Siemens, Allen-Bradley Rockwell, Delta V, Modicon and other PLC's or automation devices.

For more detailed product information,
please visit: www.go4b.com

Features

- > Sensor Interface for PLC's & Automation Systems
- > Supports PROFINET, EtherNet/IP and Modbus TCP/IP
- > Up to 16 Total Sensor Inputs with Available
- > Expansion Boards
- > Configuration Software for Easy Network
- > Set Up and Visual Overview of All Devices

Input supply voltage

- > 100 to 240 VAC
- > 24 VDC (universal supply)

Sensor supply

- > 24 VDC

Sensor options

- > Temperature (Bearing & Surface) - ADB Series (NTC Type) & Milli-Temp Series (4-20 mA)
- > Belt Misalignment - Touchswitch (Contact) or Rub Block (NTC Type)
- > Belt Speed & Slip - Milli-Speed Switch (4-20 mA), P300

- Proximity Sensor (Pulse), P800
- Proximity Sensor (Pulse), M800 Elite Speed Switch (Pulse)
- > Level Indication: Auto-Set™ or Rotary Paddle Series
- > Plug or Level Indication: Binswitch Elite or Auto-Set™

Approvals


- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi, CCC
- > Worldwide – IECEx

H x W x D

- > 248 x 188 x 133mm

Applications

- > Bucket elevators and conveyors, plant-wide monitoring

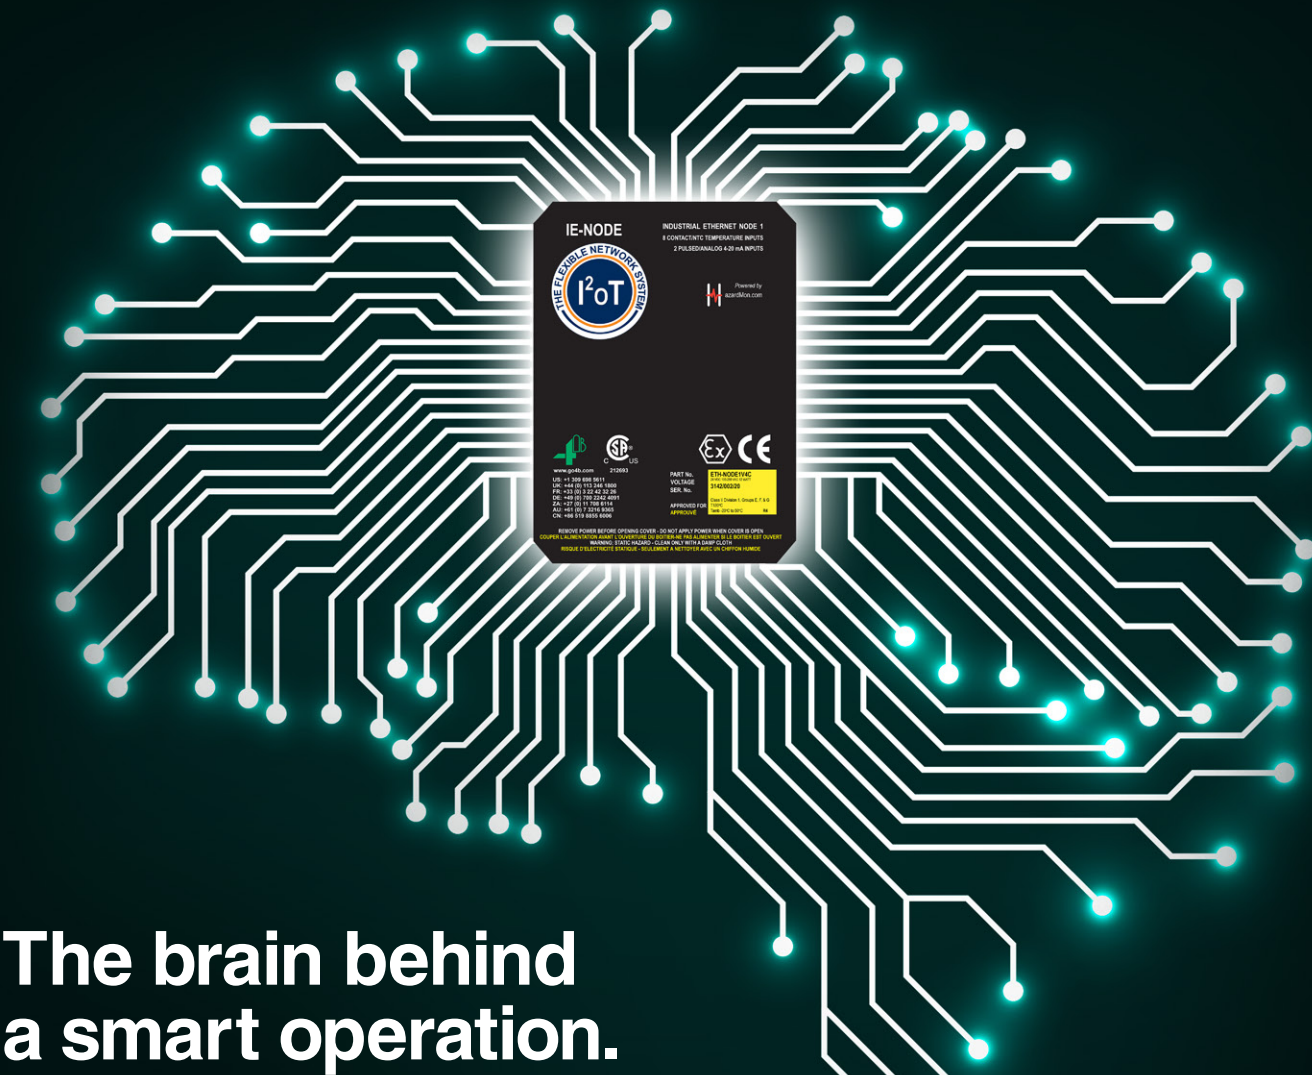

The brain behind
a smart operation.

The IE-Node. The future of hazard monitoring.


Utilizing industrial ethernet and cloud connectivity to share real-time sensor data, alongside historical analytics, with your PLC of choice — the IE-Node is truly intelligent. You can connect your entire system and keep every component in constant communication for unprecedented hazard protection.



IE-NODE EXPANSION CARDS

The **IE-NODE** comes with standard 10 sensor inputs. However, it can be extended to up to 16 via the use of expansion cards. Cards can be pre-installed at the factory when ordering a new IE-Node, or installed into existing control units already in the field.

ETH-NODE-AUXSW-4P



- Expansion board for use with 4B's IE-Node Monitors:
- > Allows an additional 4 Ethernet Ports to be added to the IE-Node
 - > Enables flexible cable routing for reduced material costs and installation time

ETH-NODE-AUXI-6AN



- Additional analogue inputs:
- > Supports 6 extra 4-20 mA CLI (Current Loop Input) sensors
 - > RS485 Modbus RTU connection capability

ETH-NODE-AUXI-6NTC



- Additional NTC type temperature inputs:
- > 6 extra NTC temperature sensors or 6 contact sensors, or any combination of 6
 - > RS485 Modbus RTU connection capability

ETH-SWITCH1V4C-5P (IE-SWITCH)



An unmanaged switch with 5x RJ45 Ethernet sockets for 10/100 Mbps Ethernet Communications. Designed to work with 4B's IE-Nodes or any other devices requiring 10/100 Mbps Ethernet communications.

HAZARDOUS
AREA
APPROVALS

CSA,
ATEX, IECEx,
EAC, CCC

RJ-45
SOCKETS
SUPPORT

EtherNet/IP,
PROFINET and
Modbus TCP/IP

4000
SENSORS
PER SYSTEM

Digital, 4-20mA,
Temperature,
Speed



Put the IE-Node at the center of your operation. go4b.com

COMBINED MONITORING SYSTEMS

T500 ELITE - HOTBUS



Serial network system for continuous monitoring of bearing temperature, belt misalignment, and more

The **T500 Elite - Hotbus™** is a serial communication system specially designed to monitor up to 256 sensors, including continuous bearing temperature and belt misalignment. With automatic machine shutdown capability and PLC/PC compatibility this advanced microprocessor based system offers low cost installation, versatility and easy system expansion.

Features

- Continuous bearing temperature monitoring with user adjustable trip points
- RS485 serial communication
- Monitors up to 256 sensors
- 4 second scan time with 256 sensors installed
- Works with many types of sensors
- Enter your own sensor/location names for easy identification
- Alarm and shutdown features
- Gateways available for various PLC connections
- HazardMon.com® cloud based hazard monitoring compatible

Sensor options

- ADB, MDB, and WDB: bearing temperature
- Touchswitch: belt alignment
- P3003V34AI + SN2 Node: speed
- Autoset Series: level indicator
- Roto-Level Series: level indicator
- Binswitch: level and plug indicator

Input supply voltage

- 100 to 240 VAC
- 24 VDC (universal supply)

Sensor supply

- Use external 24 VDC supply

Approvals

- UK - UKEx
- Europe – ATEX
- USA, Canada – CSA
- Brazil - InMetro
- China - Nepsi, CCC
- Worldwide – IECEx

H x W x D

- 246 x 188 x 102mm

Applications

- Bucket elevators and conveyors



HazardMon.com®

HazardMon.com® is a secure cloud based hazard monitoring solution providing status notifications and data logging for bucket elevators and conveyors. Live system status, graphs and historical data can be viewed on any web-enabled device (smartphone, tablet PC, desktop or laptop computer). Emails can be sent to notify users whenever a change in the system's health is detected. An automated maintenance feature allows site operators to verify that all sensors on the system are operational and working correctly.



F500 Elite Fieldbus Gateway

The F500 is a communications gateway that allows for single point access to a maximum of four T500 Elite Hotbus™ systems via Fieldbus protocol. Fieldbus communication protocols supported include: Ethernet IP, Modbus TCP, Modbus RTU, DeviceNet, Profibus and others.



R500 Elite Alarm Relay Interface

The R500 is a microprocessor-controlled unit, which accepts signals from the T500 Elite Hotbus™ monitor, and is able to cause alarm or shutdown of equipment when a sensor exceeds its programmed alarm tolerance.



Hotbox Node – TN4 (Input Node)

The TN4 is a four input sensor node, powered by 24 VDC. Each input can be an NTC thermistor, PTC thermistor or Volt-Free Contact input; the types may be interchanged on a single node. The Node has a unique 4 digit address which is used to communicate to the T500 via a two wire serial RS485 connection. The TN4 Node processes information from electrical inputs into network data inputs for ADB, WDB, Binswitch or Touchswitch.



Hotbox Node – SN2 (Speed Node)

The SN2 is a two input speed node, powered by 24 VDC. The node is able to monitor two independent pulse (speed) sources for dangerous under speed conditions. The SN2 will support pulses which are PNP or sourced. The Node has a unique 4 digit address which is used to communicate to the T500 via a two wire RS485 connection. The SN2 processes information from electrical inputs into network data.



Hotbus™ Node Tester

The Hotbus Node Tester is a portable testing unit that can be used in the field to determine the operational status of any Hotbus communications node and network to quickly identify wiring or node issues.

Simply plug the network connection cable directly to the node. A digital display on the tester will show the status of the node which can determine if the node is operating correctly.



CLOUD-BASED HAZARD MONITORING

HAZARDMON







HazardMon.com® is a secure cloud based hazard monitoring solution providing status notifications and data logging for bucket elevators and conveyors. Live system status, graphs and historical data can be viewed on any web-enabled device (smartphone, tablet PC, desktop or laptop computer). Emails can be sent to notify users whenever a change in the system's health is detected. An automated maintenance feature allows site operators to verify that all sensors on the system are operational and working correctly.

Features

- Secure Cloud Based Hazard Monitoring
- Works with T500 Elite Hotbus™ & Watchdog Super Elite
- Data Logged Automatically
- Real Time System Status & Alert Email Notifications
- Automated Maintenance
- View on Any Web-Enabled Device

Register For A Free Demo Account
www.hazardmon.com
See What The Cloud Can Do For You!

HazardMon.com® enables the WDC4 and T500 systems to become Industry 4.0 enabled. It offers real-time visualization and notifications for connected users anywhere in the world. All the data is collected with a two second latency and everything is saved for historical analysis.



Live View

Real-time remote view of your factory from anywhere in the world. Support mobile and desktop views. Data is dynamically updated and presented in most efficient view for operators and managers to understand.

Data Charting

Any sensor data can be charted in a matter of two clicks. Time range is selectable between 1h and 30 days. There is also a live chart function for real-time maintenance of site.

Data Analysis

Comprehensive reports for the management to make quick data-driven decisions. With the help of Hazardmon analytics factory management can make maintenance budgeting decisions in matter of minutes. All the Hazardmon reports are exportable and can be easily incorporated into internal health and safety and performance reports.

Automated Maintenance

Completely automated sensor testing process, which allows factory maintenance staff and management to comply with the annual or bi-annual test schedule. Just click on a sensor which needs testing, cause and alarm and clear the alarm. All of the conditions are logged along with the sensor location, name, operator full name, date and time, as well as the test outcome. The maintenance report can then be easily generated and exported in .CSV format.

Continuous Improvements

Hazardmon is updated several times a year with feedback from existing and new customers driving the changes. There is a constant flux of new industry-leading features. Hazardmon together with the innovative sensing solutions allows 4B Group to stay a technology and solutions leader in the industry and at the forefront of Industry 4.0 and IoT research.



For more detailed product information, please visit: www.go4b.com

TEMPERATURE MONITORING

T400N ELITE HOTSWITCH



Bearing temperature monitor

The **T400N Elite Hotswitch** is a microprocessor controlled temperature monitor, which works in conjunction with NTC temperature sensors to monitor up to 8 bearings and can provide an alarm and automatic shutdown when a high bearing temperature condition is detected.

Features	Input supply voltage
<ul style="list-style-type: none">Monitors up to 8 NTC bearing sensorsIncludes 2 separate alarm and 2 separate stop relays (2 machines monitored).Short circuit / open circuit fail-safe detectionStatus LEDs provide quick location of the hot bearing conditionA range of alarms temperatures available from 45°C to 80°CAlarm mute with automatic time delayed reactivationPLC board (optional)	<ul style="list-style-type: none">100 to 240 VAC24 VDC (universal supply)
Sensor supply	<ul style="list-style-type: none">24 VDC
Approvals	<ul style="list-style-type: none">UK - UKExEurope – ATEXUSA, Canada – CSABrazil - InMetroChina - Nepsi, CCCWorldwide – IECEx
Sensor options	<ul style="list-style-type: none">ADB, MDB, and WDB Series: bearing temperatureExtensive range of sensors available from 50 - 100°CContinuous temperature sensorsModbus RTU connection
H x W x D	<ul style="list-style-type: none">246 x 188 x 102mm
Applications	<ul style="list-style-type: none">Bucket elevators and conveyors

T400 ELITE HOTSWITCH



Bearing temperature monitor

The **T400 Elite Hotswitch** is a microprocessor controlled temperature monitor, which works in conjunction with PTC temperature sensors to monitor up to 48 bearings and can provide an alarm and automatic shutdown when a high bearing temperature condition is detected.

Features	Input supply voltage
<ul style="list-style-type: none">Monitors 8 zones with up to 6 PTC sensors in each zone (48 total)Status LEDs provide quick location of the hot bearing conditionSensors are positively mounted grease throughAlarm mutePLC board with 8 contact outputs (optional)Cold / hot status only	<ul style="list-style-type: none">100 to 240 VAC24 VDC (universal supply)
Sensor supply	<ul style="list-style-type: none">24 VDC
Approvals	<ul style="list-style-type: none">UK - UKExEurope – ATEXUSA, Canada – CSABrazil - InMetroChina - Nepsi, CCCWorldwide – IECEx
Sensor options	<ul style="list-style-type: none">ADB-MDB-WDB Series: bearing temperatureExtensive range of sensors available from 50 - 100°CPTC type - step sensors
H x W x D	<ul style="list-style-type: none">246 x 188 x 102mm
Applications	<ul style="list-style-type: none">Bucket elevators and conveyors

BELT ALIGNMENT MONITORING

B400 ELITE



Conveyor or bucket elevator belt alignment monitoring system

The **B400 Elite** is a microprocessor based control unit which uses sensors to detect belt misalignment by pressure (Touchswitch) from one or two elevators/conveyors. The unit is able to provide an alarm and automatic shutdown of the elevator/conveyor when a belt misalignment condition is detected.

Features	Input supply voltage
<ul style="list-style-type: none">Uses up to 4 touch sensorsMonitors alignment of belts in two separate machines or top and bottom alignment in one machineIncludes 2 separate alarm and 2 separate stop relaysSimple, reliable, consistentFully functional test via push button on front panel for general testing	<ul style="list-style-type: none">100 to 240 VAC24 VDC (universal supply)
Sensor supply	<ul style="list-style-type: none">24 VDC
Approvals	<ul style="list-style-type: none">UK - UKExEurope – ATEXUSA, Canada – CSABrazil - InMetroChina - Nepsi, CCCWorldwide – IECEx
Sensor options	<ul style="list-style-type: none">Touchswitch: force activated
H x W x D	<ul style="list-style-type: none">246 x 188 x 102mm
Applications	<ul style="list-style-type: none">Belt bucket elevators and conveyors

A400 ELITE



Bucket elevator belt alignment monitoring system


The **A400 Elite** is a microprocessor based control unit which uses high power magnetic sensors that detect moving metallic buckets or bolts from either one or two bucket elevators. The unit is able to provide an alarm and automatic shutdown of the elevator when a belt misalignment/ underspeed condition is detected.

Features	Input supply voltage
<ul style="list-style-type: none">Uses up to 4 magnetic (reluctance) alignment sensorsMonitors alignment of belts in two separate elevators or top and bottom alignment in one elevatorIncludes 2 separate alarm and 2 separate stop relaysSimple, reliable, consistentFully functional test via push button on front panel	<ul style="list-style-type: none">100 to 240 VAC24 VDC (universal supply)
Sensor supply	<ul style="list-style-type: none">24 VDC
Approvals	<ul style="list-style-type: none">UK - UKExEurope – ATEXUSA, Canada – CSABrazil - InMetroChina - Nepsi, CCCWorldwide – IECEx
Sensor options	<ul style="list-style-type: none">WDA Series: motion alignmentBAP Series: motion alignment
H x W x D	<ul style="list-style-type: none">246 x 188 x 102mm
Applications	<ul style="list-style-type: none">Belt bucket elevators



BELT MISALIGNMENT MONITORS

TOUCHSWITCH

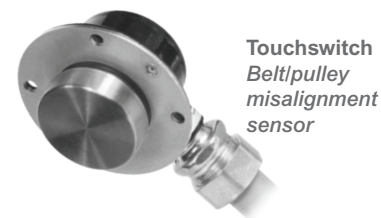

The **Touchswitch** is an electro-mechanical limit switch with no moving parts, that detects the misalignment of both pulleys and belts in conveyors and bucket elevators. The sensor detects the lateral force of the belt or pulley and activates a volt-free solid state relay. Sensor output can be used to activate an alarm or shutdown the machine. The sensors are normally installed in pairs on opposite sides of the belt/pulley.

Features

- > Hardened stainless steel face
- > External test wheel for quick and simple sensor/system testing
- > Not affected by dust or material build up
- > No calibration or sensitivity adjustment needed
- > No calibration needed
- > No moving parts
- > Food Grade (TS2V34AI-FG) type available.

Supply voltage

- > 12-24 VDC

Compatible 4B control unit

- > Watchdog
- > T500
- > B400


Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi, CCC
- > Russia - EAC (all TS except TS2V34AI)
- > Worldwide – IECEx

Applications

- > Belt/pulley misalignment on elevators and conveyors

WDA HIGH POWER SENSOR

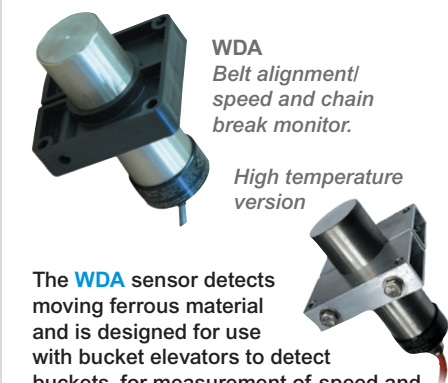

The **WDA** sensor detects moving ferrous material and is designed for use with bucket elevators to detect buckets, for measurement of speed and alignment. WDA is a non-contact sensor, detecting metallic targets at up to 100mm range. It can also detect ferrous bolts where plastic or 316 stainless buckets are used. The sensor is used in conjunction with a PLC or with a Watchdog or A400 Elite control unit.

Features

- > Long range magnetic sensor unaffected by material build up
- > Continuously monitors the moving elevator, with visual indication by an LED
- > 25-75mm range depending on the size of the target, easily adjusted from the sensor itself or from the optional independent control unit
- > Mounting bracket included
- > Stainless steel construction
- > High temperature version available (not ATEX approved)

Supply voltage

- > 24 VDC

Compatible 4B control unit

- > Watchdog

Approvals

- > UK - UKEx
- > Europe – ATEX (standard version)
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi
- > Worldwide – IECEx

Applications

- > Belt alignment
- > Belt speed (when used with Watchdog)
- > Chain slack / break monitor (page 21)

BAP



The **BAP** detects moving ferrous material and is designed for use with bucket elevators to detect belt misalignment condition. It can also detect ferrous bolts where plastic or 316 stainless buckets are used. The sensor is used in conjunction with a PLC or with a Watchdog or A400 Elite control unit.

Features

- > Magnetic sensor unaffected by material build up
- > Continuously monitors the moving elevator, with visual indication by an LED
- > 12-50mm range depending on the size of the target, easily adjusted from the sensor itself or from the optional independent control unit

Supply voltage

- > 12/24 VDC

Compatible 4B control unit

- > Watchdog

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi, CCC
- > Russia - EAC
- > Worldwide – IECEx

Applications

- > Belt alignment sensor

BELT ALIGNMENT & RIP DETECTORS

BULLDOG



The **Bulldog** alignment and rip detection switch is an electro-mechanical system designed to detect dangerous belt misalignment and belt tear damage on open belt conveyors. The switch will detect misalignment of belts when contact is made with the roller; the roller arm will be forced to pivot by the belt activating a switch at 20° to trigger an alarm, and 35° to trigger a shut down. The sensors are usually installed in pairs on opposite sides of the belt. A flexible wire is set below the running conveyor belt attached by a rare earth magnet at each end. If the belt is ripped or damaged the wire is pulled away releasing the magnet connection which in turn will activate a switch to trigger an alarm or shut down.

Features

- > Easy installation without calibration
- > Solid construction
- > Triggers an alarm at 20° and a shutdown of the machine at 35°
- > Wire rope for optional belt rip detection

Supply voltage

- > 110-240 VAC

Compatible 4B control unit

- > Watchdog
- > T500
- > B400

Approvals

- > UK - UKEx
- > Europe – ATEX
- > China - CCC
- > Worldwide – IECEx

Applications

- > Open belt conveyor alignment monitoring
- > Belt rip detection

CONVEYOR SAFETY STOP SWITCH

PULLSWITCH



The **Pullswitch** is a failsafe taut wire emergency pull cord stop switch for open conveyors. PVC coated steel pull wires and pigtails connect between the switches to provide easy installation and continuous emergency stop access along the length of the entire conveyor. Pullswitches can be installed at 60m intervals, reducing overall system cost. Quick location of a tripped switch is provided by a flag marker or optional reflector, and the tripped signal can be wired back to a PLC or one of 4B's controllers.

Features

- > Pullwire safety switch provides a safe and reliable means of stopping conveyors
- > Double ended pull mechanism as standard
- > Slack or taut wire operation
- > Tough UV stabilised lightweight polycarbonate enclosure
- > Designed for arduous environments e.g. quarries, open cast mines

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA

Applications

- > Safety stop switch for open belt conveyors



Pullswitch installed on open belt conveyor





SPEED SWITCHES

M100 STOPSWITCH



Stopped motion monitor

The **Stopswitch** is a straightforward shaft speed monitoring device. The 2-wire technology saves you time and makes installation hassle-free. If the shaft stops rotating, the Stopswitch will provide an output. It requires no calibration to operate and is a great tool for process control, motion verification and stopped shaft indication.

Features

- > Small 18mm diameter
- > Totally sealed
- > 3m cable
- > Status LED's

Style

- > 18mm cylindrical

Supply voltage

- > 24 to 240 VAC/VDC

Output

- > Stopped motion detection

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Brazil - InMetro
- > Russia - EAC
- > China - Nepsi, CCC
- > Worldwide – IECEx

Applications

- > Process control
- > Provides a signal when the shaft has stopped rotating

M300 SLIPSWITCH 2 OR 5-WIRE



Intelligent underspeed switch 2 or 5-wire version available

User friendly and easy to install, the **Slipswitch** is a simple shaft speed monitoring device. Available in 2-wire and 5-wire models, the Slipswitch is self-calibrating and provides a 20% underspeed output to protect against dangerous belt slip and underspeed conditions.

Features

- > Totally sealed
- > Auto calibration
- > 2 or 5-wire connection
- > 3m cable
- > Status LED's

Style

- > 30mm cylindrical

Supply voltage

- > 24 to 240 VAC/VDC

Output

- > 20% underspeed detection

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Brazil - InMetro
- > Russia - EAC
- > China - Nepsi, CCC
- > Worldwide – IECEx

Applications

- > Conveyors, bucket elevators, any speed sensitive shaft for automatic 20% underspeed detection

M800 SPEEDSWITCH



Intelligent underspeed switch with three outputs

A solid state unit with no moving parts, the **M800** is maintenance free. The unit operates using an inductive sensing device and requires no contact with the monitored machine. The M800 is calibrated to the machine's normal RPM. If the shaft speed falls by 10%, the M800 will alarm, and by 20% it will shut the machine down.

Features

- > Totally sealed
- > Auto calibration
- > 1/2-inch conduit entry with 2m cable
- > Status LED's

Style

- > DIN (40mm x 40mm)

Supply voltage

- > 24 - 240 VAC/VDC

Output

- > 1 x 10% underspeed relay
- > 1 x 20% underspeed relay
- > 1 x opto-isolated pulse (All 3 outputs in 1 unit)

Approvals

- > USA, Canada - CSA

Applications

- > Conveyors, bucket elevators, any speed sensitive shaft for automatic underspeed detection with 10% alarm and 20% shutdown and pulsed output.

MILLISPEED - EU



Intelligent underspeed switch with three outputs

The **Milli-Speed Switch** with 4 - 20 mA output is designed to detect belt slip, belt underspeed, stop motion, and zero speed on bucket elevators, conveyors, airlocks, mixers, fans, grinders and many other rotating machines. Totally sealed and simple to calibrate.

Features

- > 4 - 20 mA output
- > Normalised output
- > Simple magnetic calibration
- > Loop powered (2 wire)
- > Totally sealed construction: submersible
- > Easy installation with Whirligig® mount
- > SpeedMaster™ compatible for accurate testing

Style

- > 30mm cylindrical

Supply voltage

- > 24 to 240 VAC
- > 17-30 VDC

Output

- > Over speed 20 mA (of calibrated speed)
- > Calibrated speed 17 mA (100%)
- > Zero speed 4 mA (0 - 10% of calibrated speed)

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Brazil - InMetro
- > Russia - EAC
- > China - Nepsi, CCC
- > Worldwide – IECEx

Applications

- > Conveyors, elevators, any speed sensitive shaft for automatic underspeed detection with 10% alarm and 20% shutdown

MILLISPEED - US



Monitors Rotating Machinery for Dangerous Underspeed Conditions

The **Milli-Speed Switch** with 4 - 20 mA output is designed to detect belt slip, belt underspeed, stop motion, and zero speed on bucket elevators, conveyors, airlocks, mixers, fans, grinders and many other rotating machines. Totally sealed and simple to calibrate.

Features

- > 4 - 20 mA output
- > Normalised output
- > Simple magnetic calibration
- > Loop powered (2 wire)
- > Totally sealed construction: submersible
- > Built in conduit adaptor (1/2" NPT)
- > Easy installation with Whirligig® mount
- > SpeedMaster™ compatible for accurate testing

Style

- > DIN (40mm x 40mm)

Supply voltage

- > 17 - 30 VDC

Output

- > Over speed 20 mA (123% or more of calibrated speed)
- > Calibrated speed 17 mA (100%)
- > Zero speed 4 mA (0 - 10% of calibrated speed)


Approvals

- > USA, Canada - CSA

Applications

- > Conveyors, elevators, any speed sensitive shaft for automatic underspeed detection with 10% alarm and 20% shutdown

WHIRLIGIG

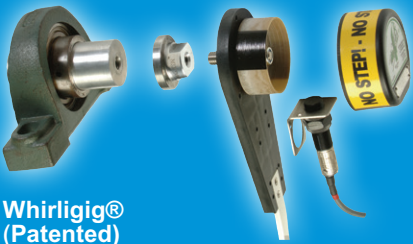

Whirligig® (Patented)

The Whirligig is the new standard for shaft speed monitoring. It is a three-in-one universal shaft sensor mount that makes installation simple and more reliable for all inductive shaft speed sensors.

Your sensor mounts to the Whirligig and the complete assembly bolts to the machine's shaft. Machine and shaft vibration does not affect the performance of the sensor, as the whole assembly moves with the shaft. Personal safety is also improved since the rotating target is completely enclosed behind a tough plastic cover.

- > Fully Guarded Target for Easy Mounting of Motion Sensors
- > For DIN Style and Standard Cylindrical Inductive Sensors
- > Easy Installation – Only Requires M12 Tapped Hole in the Machines Shaft or Use a Mag-Con™ for Magnetic Connection
- > Available with 1, 2 or 4 Targets
- > Imperial version available
- > ATEX, UKEx, EAC

MagCon™ Magnetic Connector (Patented)

50mm diameter magnetic coupler with 150 lb/660N of pulling force for connecting M12 thread to rotating shaft. Saves on drilling and tapping.

- > Imperial version available

TEST TOOLS

SpeedMaster™ Speed Switch Tester

The Speedmaster is a calibration and testing device that accurately tests the calibration of a speed switch, and allows testing of the 10% alarm and 20% shutdown features of the sensor while installed on the machine shaft.



For more detailed product information, please visit: www.go4b.com

All 4B speed and inductive sensors are compatible with the Whirligig universal shaft sensor mount.

INDUCTIVE SENSORS

INDUCTIVE SENSORS

P100 INDUCTIVE SENSOR



Inductive Proximity Sensor

Inductive proximity sensors used to signal the position of equipment in conveyors, elevators and other mechanical assemblies. Also used as pulse generators for speed detection.

Features

- > IP 65
- > Watchdog and PLC compatible
- > Visual indication of output state by LED

Style

- > 18mm cylindrical

Supply voltage

- > 24 to 240 VAC/VDC
- > 10-30VDC

Output

- > FET transistor output
- > PNP or NPN output

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi, CCC
- > Russia - EAC
- > Worldwide – IECEx

Applications

- > Conveyors, elevators and other mechanical assemblies, and other proximity detection and speed applications.

P300 INDUCTIVE SENSOR



Inductive Proximity Sensor

Inductive proximity sensors used to signal the position of equipment in conveyors, elevators and other mechanical assemblies. Also used as pulse generators for speed detection.

Features

- > IP 65
- > Watchdog and PLC compatible
- > Visual indication of output state by LED

Style

- > 30mm cylindrical
- > 2 and 4 wire

Supply voltage

- > 24 to 240 VAC/VDC
- > 10-30VDC

Output

- > FET transistor output
- > PNP or NPN output

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Brazil - InMetro
- > China - Nepsi, CCC
- > Russia - EAC
- > Worldwide – IECEx

Applications

- > Conveyors, elevators and other mechanical assemblies, and other proximity detection and speed applications.



Compatible with the Whirligig speed sensor mount

ACCESSORIES

WHIRLIGIG



Whirligig® (Patented)

The Whirligig is the new standard for shaft speed monitoring. It is a three-in-one universal shaft sensor mount that makes installation simple and more reliable for all inductive shaft speed sensors.

Your sensor mounts to the Whirligig and the complete assembly bolts to the machine's shaft. Machine and shaft vibration does not affect the performance of the sensor, as the whole assembly moves with the shaft. Personal safety is also improved since the rotating target is completely enclosed behind a tough plastic cover.

- > Fully Guarded Target for Easy Mounting of Motion Sensors
- > For DIN Style and Standard Cylindrical Inductive Sensors
- > Easy Installation – Only Requires M12 Tapped Hole in the Machines Shaft or Use a Mag-Con™ for Magnetic Connection
- > Available with 1, 2 or 4 Targets
- > Imperial version available
- > ATEX, UKEx, EACEx



MagCon™ Magnetic Connector (Patented)

50mm diameter magnetic coupler with 150 lb/660N of pulling force for connecting M12 thread to rotating shaft. Saves on drilling and tapping.



- > Imperial version available

TEST TOOLS

SpeedMaster™ Speed Switch Tester

The Speedmaster is a calibration and testing device that accurately tests the calibration of a speed switch, and allows testing of the 10% alarm and 20% shutdown features of the sensor while installed on the machine shaft.



For more detailed product information, please visit: www.go4b.com

ENCODERS

ROTECH ENCODERS

The 4B heavy duty Rotech rotary shaft encoders are used primarily for protecting equipment and personnel from dangerous underspeed/belt slip conditions in extreme environments. Other applications include accurate speed control, direction of rotation detection, gate position indication and counting the number of revolutions of the shaft.

POLYPROPYLENE SHAFT ENCODER



Features

- > Heavy duty design
- > 1 to 1,000 PPR
- > Multiple outputs
- > Intrinsically safe option available
- > IP66

Style

- > Polypropylene (reinforced with 30% glass)
- > Totally self-contained (no guards required)

Supply voltage

- Model dependent:
- > 10-30Vdc
 - > 20-240VAC

Output

- Model dependent:
- > Intrinsically safe
 - > NPN
 - > PNP
 - > Quadrature

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Worldwide - IECEx
- > USA & Canada - CSA

Applications

- > Conveyors, bucket elevators or any shaft speed measurement

ALUMINIUM SHAFT ENCODER



Features

- > Ultra heavy duty
- > 1 to 1,000 PPR
- > Multiple outputs
- > Intrinsically safe option available
- > IP67

Style

- > Cast aluminium construction
- > Totally self-contained (no guards required)

Supply voltage

- Model dependent:
- > 8.2Vdc for intrinsically safe version
 - > 10-30Vdc
 - > 20-240VAC

Output

- Model dependent:
- > Intrinsically safe
 - > NPN
 - > PNP
 - > Quadrature

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Worldwide - IECEx
- > USA & Canada - CSA

Applications

- > Conveyors, bucket elevators or any shaft speed measurement

STAINLESS STEEL ENCODER



Features

- > Ultra heavy duty
- > 1 to 1,000 PPR
- > Multiple outputs
- > Intrinsically safe option available
- > IP67

Style

- > 304 or 316 stainless steel
- > Totally self-contained (no guards required)

Supply voltage

- Model dependent:
- > 8.2Vdc for intrinsically safe version
 - > 10-30Vdc
 - > 20-240VAC

Output

- Model dependent:
- > Intrinsically safe
 - > NPN
 - > PNP
 - > Quadrature

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Worldwide - IECEx
- > USA & Canada - CSA

Applications

- > Conveyors, bucket elevators or any shaft speed measurement

WHEEL ENCODER



Features

- > Heavy duty design
- > 1 to 1,000 PPR
- > Multiple outputs
- > Intrinsically safe option available
- > IP67

Style

- > Trailing arm and wheel

Supply voltage

- Model dependent:
- > 8.2Vdc for intrinsically safe version
 - > 10-30Vdc
 - > 20-240VAC

Output

- Model dependent:
- > Intrinsically safe
 - > NPN
 - > PNP
 - > Quadrature

Approvals

- > UK - UKEx
- > Europe - ATEX
- > Worldwide - IECEx
- > USA & Canada - CSA

Applications

- > Belt speed monitoring applications



ACCESSORIES

MAGCON

MagCon™ Magnetic Connector (Patented)

50mm diameter magnetic coupler with 150 lb/660N of pulling force for connecting M12 thread to rotating shaft. Saves on drilling and tapping.

- > Imperial version available



SPEED RELAY

DIN rail mounted speed relay can be used with any PNP or NPN pulsed output sensor for providing a user adjustable underspeed relay contact output to alarm or shutdown machinery.



TACHO DISPLAY

Bright 25mm high 4-digit LED display unit for connection to any PNP or NPN transistor output sensor to indicate shaft speed. The unit incorporates a user-adjustable under speed relay contact output. Quadrature display also available.



ADB BEARING SENSOR TESTER

The **ADB Sensor Tester** has been designed to test 4B adjustable depth bearing (ADB) temperature sensors in the field. This hand held test unit features an integrated heating block specifically designed to have a 4B ADB sensor directly inserted. With integral controls and temperature display, the unit heats the sensor to the desired trip point, and allows quick and easy real life testing of the sensor and temperature monitoring system.

During planned maintenance or periodic testing, the ADB Sensor Tester can be used as a diagnostic tool to verify the alarm and shutdown sequences of the control unit are functioning as expected. To test, the heater block should be set above the control units alarm operating temperature. Remove the ADB bearing sensor probe from the housing and insert it into the heater block. As the heater block reaches the alarm temperature, the ADB sensor will relay this data to the control unit, allowing you to verify that the alarm and shutdown sequences run as expected.


Features

- > ADB Bearing Sensor Tester
- > Hand Held Portable Unit
- > Exact Alarm Point Testing
- > Exact Shutdown Point Testing
- > Easy To Read Display



ADB WRENCH

Used to loosen and tighten the ADB bearing temperature probe for proper depth adjustment.



ADB Sensor Installed on Conveyor Bearing

For more detailed product information, please visit: www.go4b.com

BEARING TEMPERATURE SENSORS

BEARING TEMPERATURE SENSORS

ADB



The **ADB** series have been designed to allow the depth of the sensor to be adjustable depending on your application. Three standard versions are available with probe lengths of 50, 100 and 200mm (other lengths available for special order). The sensors screw directly into a bearing housing through the existing grease zerk thread. Each sensor is fitted with a grease zerk to allow lubrication of the bearing without the need for removal of the sensor. The ADB style sensors are available with a standard NTC thermistor for 4B's Hotbus and Watchdog systems, or a Pt100 - RTD type for PLC and DCS systems.

Features

- > Screw in positive mount installation
- > Grease zerk for bearing lubrication
- > Adjustable depth (50, 100, 200mm probes)
- > 1/4" NPT (brass body)
- > NTC or Pt100 RTD versions – continuous temperature

Sensor options

- > NTC Thermistor
- > Pt-100 4-wire RTD
- > Selectable probe length: 50, 100 and 200 mm

Input supply voltage

- > 12/24 VDC (current limited)

Compatible 4B control unit

- > Watchdog > T400
- > T500 > IE-NODE

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > China - CCC
- > Russia - EAC
- > Worldwide – IECEx

Applications

- > Bearing temperature control
- > Temperature measurement

MILLITEMP



The **Milli-Temp** is a loop powered analog sensor with a 4-20 mA linear output that is scaled across a temperature range for continuous temperature monitoring. The sensor has been designed to allow the depth of the probe to be adjustable depending on your application. The sensor screws directly into a bearing housing through the existing grease zerk thread. Each sensor is fitted with a zerk to allow lubrication of the bearing without the need for removal of the sensor.

Features

- > 4-20 mA output
- > Screw in positive mount installation
- > Grease zerk for bearing lubrication
- > Lug style adaptor (surface temp.)
- > 1/2" NPT conduit entry
- > 304 stainless steel body

Sensor options

- > Selectable probe length: 50, 100 and 200mm
- > 4-20 mA loop

Input supply voltage

- > 15-28 VDC (24VDC nominal)

Compatible 4B control unit

- > Watchdog
- > IE-NODE

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > China - CCC
- > Worldwide – IECEx

Applications

- > Bearing temperature control
- > Temperature measurement

BEARING TEMPERATURE SENSORS

WDB7 LUG STYLE



The **WDB7** series is a lug style NTC, Pt-100 or PTC thermistor type for surface temperature monitoring and has been designed to bolt directly onto a bearing housing, motor, gearbox, or machine casing. The mounting hole is 8mm from the factory, but can be drilled up to 13mm if needed. The sensor can be connected to a PLC or to a hazard monitoring system, such as 4B's T500 Hotbus Elite, Watchdog Elite, or T400 Elite. The connections are not polarity sensitive therefore special connection requirements are eliminated.

Features

- > Surface mount installation
- > 8mm to 13mm bolt entry
- > 1/2" NPT conduit entry
- > Continuous temperature monitoring

Sensor options

- > NTC Thermistor
- > Pt-100 4-wire RTD
- > PTC (trip temperature selected at time of purchase)

Input supply voltage

- > 12/24 VDC (current limited)

Compatible 4B control unit

- > Watchdog > T400
- > T500 > IE-NODE


Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Worldwide – IECEx

Applications

- > Surface temperature measurement and control

MDB

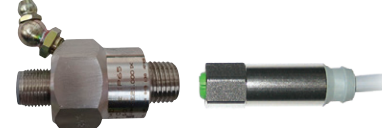

The **MDB** series is a range of bearing sensors manufactured to screw directly into a bearing housing through the existing 1/4" BSP threaded grease zerk (can be installed in 1/8" NPT grease zerk fitting with an adapter). Each sensor is fitted with a grease zerk to allow lubrication of the bearing without the need for removal of the sensor. The sensor is fitted with a M12 connector for use with a separately supplied cable and socket assembly which can be connected directly to a PLC or to a hazard monitoring system, such as 4B's T500 Hotbus Elite, Watchdog Elite, or T400 Elite. The connections are not polarity sensitive therefore special connection requirements are eliminated.

Features

- > Screw in installation
- > Grease zerk for bearing lubrication
- > Wiring connector

Sensor options

- > NTC Thermistor
- > Pt-100 4-wire RTD
- > PTC (trip temperature selected at time of purchase)

Input supply voltage

- > 12/24 VDC (current limited)

Compatible 4B control unit

- > Watchdog > T400
- > T500

Approvals

- > UK - UKEx
- > Europe – ATEX

Applications

- > Bearing temperature control
- > Temperature measurement

WDB8



The **WDB8** series is a range of bearing temperature sensors designed to screw directly into an existing 1/4" BSP grease zerk fitting on a bearing housing. Each sensor is fitted with a grease nipple to allow lubrication of the bearing without the need for removal of the sensor. The WDB Series is available with either a PTC thermistor with various factory set trip points or an NTC thermistor with a user adjustable trip point.

Features

- > Screw in positive mount installation
- > Grease zerk for bearing lubrication
- > 1/4" BSP (brass body)
- > Cable with protective anti-bend cover

Sensor options

- > NTC Thermistor
- > PTC (trip temperature selected at time of purchase)

Input supply voltage

- > 12/24 VDC (current limited)

Compatible 4B control unit

- > Watchdog > T400
- > T500 > IE-NODE

Approvals

- > UK - UKEx
- > Europe – ATEX
- > USA, Canada – CSA
- > Worldwide – IECEx






Applications




- > Bearing temperature control

LEVEL INDICATORS



ACCESSORIES

AUTO-SET™			AUTO-SET™ REMOTE	
<p>A user friendly, reliable point level indicator for bulk granular solids, powders and liquids. Digital display, push-button calibration and material build-up compensator make this unit the elite point level sensor.</p>			<p>A user friendly, reliable point level indicator for bulk granular solids or powders where there is high vibration and/or temperature involved. Remote electronic display/control unit allows for remote calibration/set-up away from vibration or heat.</p>	
<p>A selection of screw-on stainless steel probes to suit your application.</p> <p>ATWP11</p> <p>ATSP13</p> <p>ATSP12</p> <p>ATSP11</p> <p>ATSP10</p>				
ATS8	ATS8 & EXTENDED POWER SHIELD	ATS8 FLUSH PROBE	AUTO-SET™ REMOTE PROBE	AUTO-SET™ REMOTE CONTROL
				
ATS8 RF capacitance point level indicator	ATS8 with Extended Power Shield RF capacitance point level indicator for thick-walled silos	ATS8 Flush Probe RF capacitance heavy-duty plugswitch	Auto-Set™ Remote Probe Polyprop probe - 120°C PEEK probe - 250°C Ceramic probe - 600°C	Auto-Set™ Remote Control Remote control unit with digital display and calibration push buttons
Features	Features	Features	Features	Features
<ul style="list-style-type: none">➤ Push button calibration➤ Digital display➤ Internal timer➤ Automatic material build-up compensator➤ Attachable SS probes	<ul style="list-style-type: none">➤ Push button calibration➤ Digital display➤ Internal timer➤ Automatic material build-up compensator, 12 or 16 inches long➤ Attachable SS probes	<ul style="list-style-type: none">➤ Push button calibration➤ Digital display➤ Internal timer➤ Automatic material build-up compensator➤ No moving parts	<ul style="list-style-type: none">➤ No moving parts➤ No electronic components➤ Automatic material build-up compensator➤ Attachable SS probes➤ High temp available	<ul style="list-style-type: none">➤ Push button calibration➤ Digital display➤ Internal timer➤ DIN rail mountable
Style	Style	Style	Style	Style
<ul style="list-style-type: none">➤ 1 inch BSP	<ul style="list-style-type: none">➤ 1 inch BSP	<ul style="list-style-type: none">➤ 100mm dia. probe with integral mount	<ul style="list-style-type: none">➤ 1 inch BSP	<ul style="list-style-type: none">➤ DIN rail mountable enclosure processes
Supply voltage	Supply voltage	Supply voltage	Supply voltage	Supply voltage
<ul style="list-style-type: none">➤ 120/240 VAC 24 VDC (universal supply)	<ul style="list-style-type: none">➤ 120/240 VAC 24 VDC (universal supply)	<ul style="list-style-type: none">➤ 120/240 VAC 24 VDC (universal supply)	<ul style="list-style-type: none">➤ From control unit	<ul style="list-style-type: none">➤ 120/240 VAC 24 VDC (universal supply)
Output	Output	Output	Output	Output
<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts	<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts	<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts	<ul style="list-style-type: none">➤ To control unit	<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts
Approvals	Approvals	Approvals	Approvals	Approvals
<ul style="list-style-type: none">➤ UK - UKEx➤ Europe - ATEX➤ USA, Canada - CSA	<ul style="list-style-type: none">➤ UK - UKEx➤ Europe - ATEX➤ USA, Canada - CSA	<ul style="list-style-type: none">➤ UK - UKEx➤ Europe - ATEX➤ USA, Canada - CSA➤ Worldwide - IECEx	<ul style="list-style-type: none">➤ Not approved	<ul style="list-style-type: none">➤ Not approved
Applications	Applications	Applications	Applications	Applications
<ul style="list-style-type: none">➤ Material point level indication in silos, bins and other vessels.	<ul style="list-style-type: none">➤ Material point level indication in thick-walled concrete silos.	<ul style="list-style-type: none">➤ Plug condition in chutes, discharges and pipes.	<ul style="list-style-type: none">➤ Material point level indication in surge bins, vibratory feeders and high temperature processes.	<ul style="list-style-type: none">➤ Material point level indication in surge bins, vibratory feeders and high temperature processes.

LEVEL INDICATORS		
BINSWITCH	RLI	RG SERIES
		
The Binswitch is a capacitive sensor for the detection of blockages in chute, discharges and pipes. Available in 2-wire and 5-wire models. Simple semi-automated calibration process using magnets.	The RLI is designed to signal the presence or absence of bulk materials such as: chemical products, wood chips, grain, granules and powders. It is ideal for use as a point level indicator in tanks and silos as well as a blockage detector in conveyor chutes.	The RG Level Sensors series is designed to indicate the presence or absence of bulk materials such as grains, pellets, chemicals, wood chips and other powders.If material impedes the rotation of the paddle, the motor topples of its axis and triggers an alarm. The RG has a variety of compatible paddles which offer the ability to detect a wide range of products.
Features	Features	Features
<ul style="list-style-type: none">➤ Capacitance probe➤ Detects presence or absence of liquids & free-flowing bulk granular materials➤ Easy installation & self-containing➤ Magnet calibration	<ul style="list-style-type: none">➤ High or low level indication➤ Automatic power shut off➤ Limit switch contact output➤ 14 foot vertical extensions (maximum)	<ul style="list-style-type: none">➤ Can be top and side mounted➤ Easy installation➤ Wide range of paddles available➤ Optional extensions and shard guards for more challenging applications
Style	Style	Style
<ul style="list-style-type: none">➤ 30mm cylindrical➤ 2 or 5 wire options	<ul style="list-style-type: none">➤ Rotary level indicator with 1 1/4-inch NPT mounting thread➤ Glass-fibre reinforced nylon housing	<ul style="list-style-type: none">➤ Rotary level indicator
Supply voltage	Supply voltage	Supply voltage
<ul style="list-style-type: none">➤ 24 to 240 VAC/VDC	<ul style="list-style-type: none">➤ 24 VDC➤ 110VAC➤ 240VAC	<ul style="list-style-type: none">➤ 10/240 VAC➤ 24 VDC
Output	Output	Output
<ul style="list-style-type: none">➤ Programmable high or low level detection	<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts	<ul style="list-style-type: none">➤ 1 set of voltage-free changeover relay contacts
Approvals	Approvals	Approvals
<ul style="list-style-type: none">➤ UK - UKEx➤ Europe - ATEX➤ China - CCC➤ Russia - EAC➤ Worldwide – IECEx	<ul style="list-style-type: none">➤ No explosive environment approvals	<ul style="list-style-type: none">➤ UK - UKEx➤ Europe - ATEX➤ Worldwide - IECEx
Applications	Applications	Applications
<ul style="list-style-type: none">➤ Plug condition in chutes, discharges and pipes.	<ul style="list-style-type: none">➤ Material point level indication in surge bins, vibratory feeders and high temperature processes	<ul style="list-style-type: none">➤ Material point level indication in surge bins, vibratory feeders and high temperature processes

BINSWITCH ACCESSORIES
<p>BAS3 Abrasion Shield</p> <p>Polyethylene abrasion shield for ATEX Binswitch.</p> 
<p>Mounting Plate</p> <p>Powder-coated mild steel mounting plates with 1 1/4-inch NPT or 1 inch BSP, half or full coupling. Use with Autoset, Roto-Level / RG Series Indicators and Binswitches with adapters. (Also available in stainless steel.)</p> 
PADDLE SWITCH ACCESSORIES
<p>Rotary Level Paddles</p> <p>Complete range of stainless steel paddles for Roto-Level Indicators.</p> 

<p>Binswitch Installed on Bucket Elevator Spouting (with SMP, BAS & conduit adapter)</p>

<p>Auto-Set™ Flush Probe Installed on Belt Conveyor Discharge</p>

<p>Auto-Set™ Flush Probe Installed on Screw Conveyor Discharge</p>

4B COMMISSIONING SERVICE

After 4B products have been installed by a qualified electrician, 4B's commissioning service is available to inspect and certify proper installation of our sensors and control units prior to operation. A brief overview of the service is listed below -

Features

- > All rigid and flexible conduits inspected for: cracks, breaks, tightness of connections, and suitability for purpose.
- > All wiring inspected for: ground faults, shorts, suitability for purpose.
- > All sensors and controls inspected for correct installation and wiring.
- > All sensors and controls inspected for any signs of damage, and tested to insure proper working order.
- > Detailed written inspection and testing report with any recommendations given to client.

Belt & Pulley Alignment Sensors

- > Sensors are removed from their location to ensure that they were centered on the belt.
- > Each sensor is physically inspected for damage and wear.
- > Sensor LED and alarm contacts are tested.
- > Wire terminations are inspected.

Temperature Sensors

- > All sensors are inspected and resistance is checked.
- > Sensors are also checked for correct identification, location and sensor type.
- > Sensors are checked for proper temperature alarm and shutdown trip points using 4B's ADB Tester.
- > Wire terminations are inspected.

Speed Switches

- > All speed switches are checked for proper installation.
- > Sensors are checked for proper underspeed alarm and shutdown set points using 4B's SpeedMaster™.
- > Wire terminations are inspected.




Warning: 4B recommends that all sensors are wired to provide automatic shutdown of monitored equipment, when a hazardous condition is detected.

JUNCTION BOXES

JUNCTION BOXES

4BJ JUNCTION BOXES

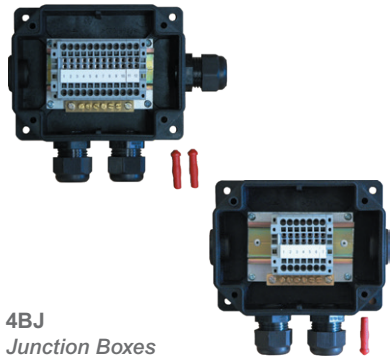

4BJ
Junction Boxes

4B Atex approved **junction boxes** allow for the easy installation of sensors in potentially explosive dust hazard environments.

Features

- > Robust glass reinforced nylon casing
- > Up to 4 gland inputs
- > Dust and water tight seal
- > Detachable cover for easy terminal access

Terminal springs

- > 6 x 2.5mm² or 12 x 2.5mm²


Approvals

- > UK - UKEx
- > Europe – ATEX
- > Worldwide – IECEx

Applications

- > Electrical installations in dust – explosive environments

D5M INLINE JUNCTION BOX

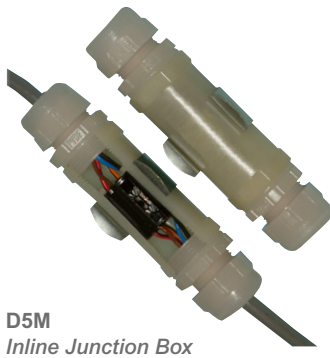

D5M
Inline Junction Box

The **D5M's** unique moulded body with Atex approved glands and mounting clip/bracket allows for in-line connection closer to the sensors simplifying connections and reducing the time of intervention during maintenance operations or repairs.

Features

- > Ideal for extending sensor cables within Atex hazard areas
- > Complete with Atex glands and mounting bracket

Terminal springs

- > 5 x 2.5mm²

Approvals

Applications

- > Electrical installations in dust – explosive environments



BROKEN OR SLACK CHAIN

MONITORING FOR DRAG CHAIN CONVEYORS




By using a WDA sensor in combination with a speed relay, ferrous steel flights or bolts on plastic paddles are used to monitor for broken or slack chain issues on drag conveyors.

The WDA is a non-contacting extended range magnetic proximity sensor, not affected by dust or material build up, used to detect moving ferrous material up to 75mm away from the sensor. The speed relay is used to monitor the speed of a rotating shaft and detect if it rises or falls below a preset safety level.


Features

- > Solution for drag chain conveyors
- > Monitor for chain slack or breakage
- > Detects movement of steel flights or bolts on plastic paddles
- > Prevent costly equipment damage and downtime
- > Simple sensor and speed relay solution

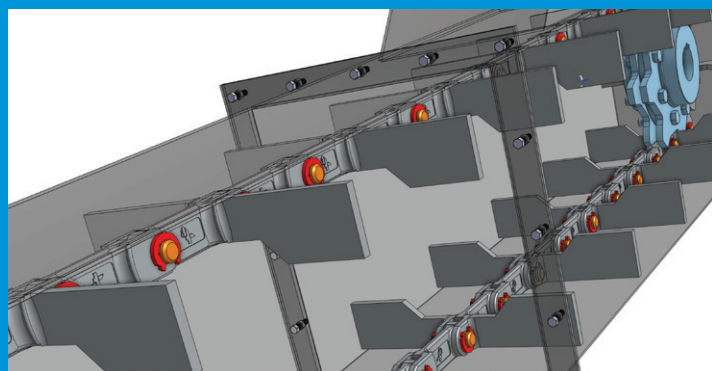


OPTION 1 > Sensor Detecting Bolt Installed on the Paddle

Under normal running conditions, the target bolt passes through the sensor's field and a pulse is sent to the speed relay. If the chain becomes slack, the target bolt will drop below the field and the pulses will stop, causing the relay contact to change state.

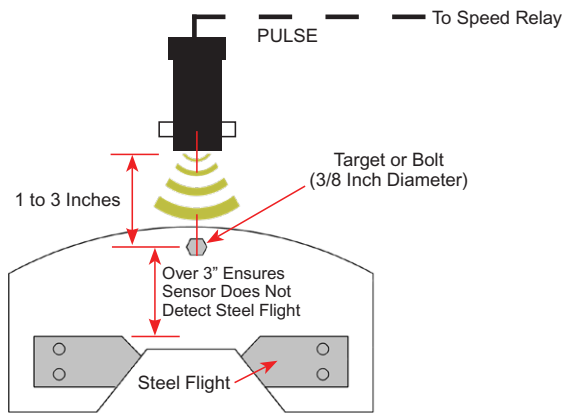


OPTION 2 > Sensor Detecting Steel Flight

Under normal running conditions, the steel flight passes through the sensor's field and a pulse is sent to the speed relay. If the chain becomes slack, the steel flight will drop below the field and the pulses will stop, causing the relay contact to change state.

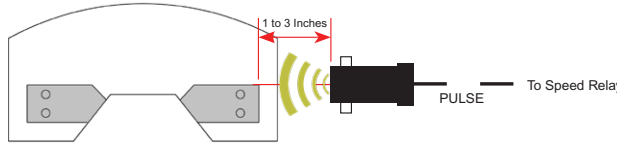

OPTION 3 > Sensor Waiting to Detect Steel Flight

Under normal running conditions, the steel flight is out of the sensor's field, so no pulses are sent to the speed relay. If the chain becomes slack, the steel flight comes into the sensor's field and a pulse is sent to the speed relay, causing it to change state.

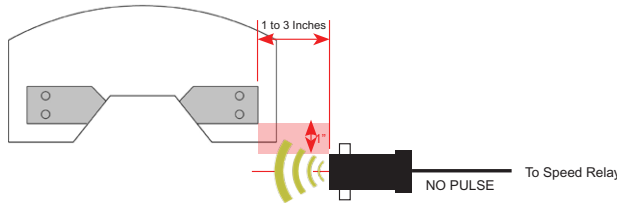


Warning: - Make sure that there is no ferrous steel (such as the machine's frame) within the sensing field.

DUST EXPLOSION PREVENTION

It is well known that transporting certain dry dusty materials, such as grain, can create explosive atmospheres.

Five conditions, known as the “Dust Explosion Pentagon”, have to exist in order for the explosive state to occur. First, there needs to be a high concentration of dust (fuel), followed by an ignition source (heat) and oxygen (oxidizer). If all of these appear in a confined space with dispersion, an explosion can occur.

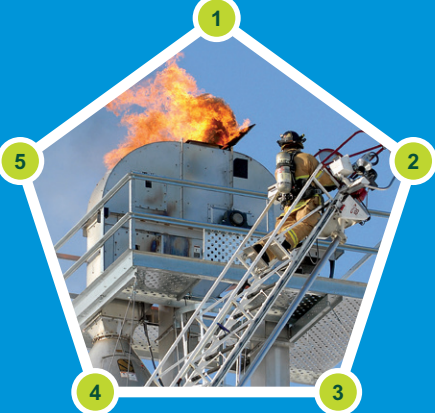

- 1 Ignition source (heat)
- 2 Confinement of the dust cloud
- 3 Oxygen in air (oxidizer)
- 4 Combustible dust (fuel)
- 5 Dispersion of dust particles

The most common ignition sources on bucket elevators and conveyors have long been identified as over-heated bearings, misaligned belts and belts that are slipping.

4B SITE INSPECTION & TESTING SERVICE

- > All rigid and flexible conduits inspected for: cracks, breaks, tightness of connections, and suitability for purpose
- > All wiring inspected for: ground faults, shorts, suitability for purpose
- > All sensors and controls inspected for correct installation, and wiring
- > All sensors and controls inspected for any signs of damage, and tested to insure proper working order
- > Detailed written inspection and testing report with any recommendations given to client

Warning: 4B recommends that all sensors are wired to provide automatic shutdown of monitored equipment, when a hazardous condition is detected.

TOOLS AND SERVICES

4B offers an array of tools and services to support you and your products. The 4B Tech Team can answer your installation and operating questions, and provide on-site inspection, testing or commissioning services for our products. 4B has developed testing tools to easily check our sensors in the field during routine maintenance. We also have a selection of tools available to help with the installation of our products.

SPEEDMASTER™



The SpeedMaster™ is the only device that accurately tests the calibration of a speed switch, and allows testing of the alarm and shutdown features of the sensor while installed on the machine shaft.

- > Speed switch calibration testing
- > Exact alarm & shutdown point testing
- > No need to modify sensor assembly for testing

ADB BEARING SENSOR TESTER



The ADB sensor tester has been designed to test 4B adjustable depth bearing (ADB) style temperature sensors in the field. With integral controls and temperature display, the unit heats the sensor to the desired trip point, and allows quick and easy real life testing of the sensor and temperature monitoring system.

HOTBUS™ NODE TESTER



The Hotbus Node Tester is a portable testing unit that can be used in the field to determine the operational status of any Hotbus communications node and network to quickly identify wiring or node issues.

- > Portable & compact
- > Optional PC connection for extensive data analysis

TOUCHSWITCH™ BELT ALIGNMENT SENSOR HOLE SAW



- > Recommended tool for Touchswitch™ sensor installation
- > 57mm carbide teeth for optimum performance and durability
- > Cobalt steel pilot drill with split point tip prevents walking
- > Built in flange stop prevents over drilling
- > Ejector spring

ALSO IN THE 4B RANGE

ASK FOR OUR CATALOGUES

BUCKET ELEVATOR COMPONENTS



ELEVATOR BUCKETS

- > Pressed seamless steel, stainless steel and welded steel
- > High density polyethylene, nylon and polyurethane
- > For agricultural and industrial applications




ELEVATOR BOLTS

- > EURO BOLTS
- > EASIFIT BOLTS
- > REF 70
- > FANG BOLTS



ELEVATOR BELTING

- > SBR / NBR
- > HOT OIL
- > FRASOR
- > T150 - High Temperature
- > FDA - White Food Quality
- > STEEL WEB



BELT FASTENERS

A range of mechanical splices and fasteners for use on most PVC, rubber and steel web elevator belts.

CONVEYOR CHAINS



DROP FORGED CHAINS

- > Made from special heat treated alloy steel
- > Case hardened to Rockwell C57- C62, with ductile core hardness of Rockwell C40
- > Maximum shock and wear resistance



DOUBLE / TRIPLE LINKS

- > For use with 2 and 3-strand chain applications
- > Ultimate strengths
- > For high capacity applications



BOLT 'N' GO CHAINS

- > Easy assembly system using bolt-on flights instead of welding
- > Available for forged and round link chains



SPROCKETS & TRAILERS

- > For drop forged chains
- > Manufactured from high grade heat treated steel
- > Minimum hardness of 57 HRC



VISIT OUR WEBSITE FOR DETAILED TECHNICAL INFORMATION:

www.go4b.com


- > Technical Manuals
- > Installation Guides
- > Wiring Guides
- > CAD Drawings
- > Certificates
- > Videos
- > Case Studies



4B GROUP

4B catalogues also available:

-  Elevator Buckets
-  Bolts & Fasteners
-  Elevator Belting
-  Forged Chains



www.go4b.com



BETTER BY DESIGN



4B Braime Components

Headquarters
Hunslet Road
Leeds, LS10 1JZ, UK
Tel: +44 (0) 113 246 1800
Email: 4b-uk@go4b.com



4B Components

625 Erie Avenue
Morton
IL 61550, USA
Tel: 309-698-5611



4B Asia Pacific

Build No.899/1 Moo 20
Soi Chongsiri
Bangplee-Tam Ru Road
Tanbon Bangpleeyai
Amphur Bangplee
Samutprakarn 10540
Thailand
Tel: +66 (0) 2173-4339
Email: 4b-asiapacific@go4b.com



4B Africa

14 Newport Business Park
Mica Drive
Kya Sand
2163 Johannesburg
South Africa
Tel: +27 (0) 11 708 6114
Email: 4b-africa@go4b.com



4B China

F1, Building 5A, 8 West Lake
Road, Wujin High & New
Technology Development Zone,
Changzhou 213164, Jiangsu
Province, China
Tel: +86-519-88556006
Email: 4b-china@go4b.com



4B Australia

Building 1, 41 Bellrick Street
Acacia Ridge,
4110, Queensland
Australia
Tel: +61 (0) 7 3216 9365
Email: 4b-australia@go4b.com



4B France

35 Bis, Rue Du 8 Mai 1945,
Villers Bretonneux, F-80800, France
Tel: +33 (0) 3 22 42 32 26
Email: 4b-france@go4b.com



4B Deutschland

35 Bis, Rue Du 8 Mai 1945,
Villers Bretonneux, F-80800, France
Tel: +49 (0) 2333 601 681
Email: 4b-deutschland@go4b.com

Our policy is one of continuous improvement; therefore we reserve the right to amend specification without prior notice. All information contained herein is provided in good faith and no warranty is given or implied. E&OE.