

SUPERGRIP

SUPERGRIP SYSTEM



www.go4b.com

The Supergrip belt fastener secures belting on bucket elevators. The two ends of the belt are gripped between extruded steel plates, clamped together by zinc plated high tensile bolts and self-locking nuts.

- Easy to fit modular system of 50mm segments.
- 4 versions available for belts up to 1250 kN/m without thickness limitation
- Each assembly comprises 2 half joints, high tensile bolt & self-locking nut
- With standard nylon nuts - max temp. 80° C, for temp. 80° C+ specify Philidas nuts.
- Available in stainless steel.

SUPERGRIP 系统

Supergrip 输送带紧固件可以将输送带固定在斗式提升机上。输送带两端被夹在挤制钢板之间，被镀锌高强度螺栓和自锁螺母夹在一起。

- 安装简便的 50mm 分段式模块化系统。
- 针对最大 1250 kN/m 的螺栓提供 4 种型号（无厚度限制）
- 每个总成包含 2 个半接头、高强度螺栓以及自锁螺母
- 带有标准尼龙螺母 - 最高温度为 80° C；对于 80° C 以上的温度，请指定 Philidas 螺母。
- 可提供不锈钢材质。




SUPERGRIP SYSTEM

SUPERGRIP 系统

Example of joint using 3 Supergrips on a belt of 150 to 195mm wide. 25mm minimum belt projection for all sizes.

示例：在宽度为 150 至 195mm 的输送带上使用 3 个 Supergrip 的接头。25mm 最小输送带投影，适用于所有尺寸。

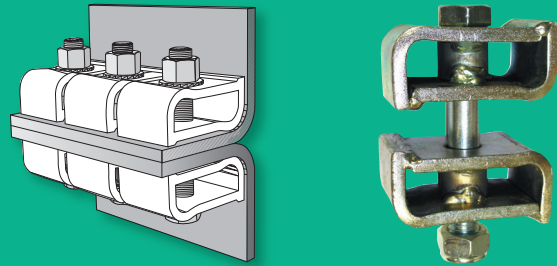

Supergrip No.1/Supergrip 1 号 | Supergrip No.2/Supergrip 2 号 | Supergrip No.3/Supergrip 3 号 | Supergrip No.4/Supergrip 4 号

500kN/m	630kN/m	800kN/m	1,000/1,250kN/m
0.5Kgs/m	0.8Kgs/m	0.85Kgs/m	1.83Kgs/m
Bolt/螺栓 M14	Bolt/螺栓 M14	Bolt/螺栓 M14	Bolt/螺栓 M16

Bespoke belt clamps available for belts over 1250kN/m. Contact 4B's technical department.
对于超过 1250kN/m 的输送带，可定制输送带钳夹。请联系 4B 的技术部门。

