


T150 - HIGH HEAT BELT

HIGH HEAT BELT

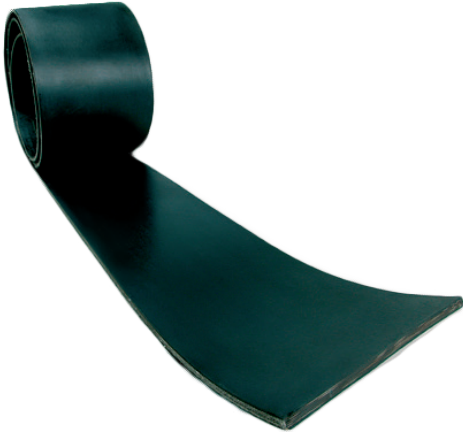

Suitable for applications in elevators handling products of up to 150°C and short peaks of 180°C.

Used in the cement, coal, dry chemicals, fly ash industries. Use special 3+3 covers to prevent heat reaching the carcass.


For further advice contact technical department.

Technical Specifications

- > Product Norm: DIN 22102 ETY
- > E = anti-static DIN 22104
- > T = heat resistant up to 150°C, EPDM covers and plies resistant to mineral oils at low temperatures, resistant to acids and lyes in low concentrations
- > Y = good abrasion resistance according to IN 53516

- > Elongation at maximum recommended working load 2.5% at high temperatures

Temperature Range

- > -20°C to +150°C 

TYPE	Thickness (mm)	Weight (kg/m ²)	Min. Pulley ø (mm)
EPDM800/4 3+3 NBR T150	11.3	12.0	500

