

## ADB Bearing Sensor Tester

### Adjustable Depth Bearing Temperature Tester

**NEW**  
PRODUCT

#### APPLICATION

The ADB Sensor Tester has been designed to test 4B adjustable depth bearing (ADB) style temperature sensors in the field. This hand held test unit features an integrated heating block specifically designed to have a 4B ADB sensor directly inserted. With integral controls and temperature display, the unit heats the sensor to the desired trip point, and allows quick and easy real life testing of the sensor and temperature monitoring system.

#### METHOD OF OPERATION

During planned maintenance or periodic testing, the ADB Sensor Tester can be used as a diagnostic tool to verify the alarm and shutdown sequences of the control unit are functioning as expected. To test, the heater block should be set above the control units alarm operating temperature. Remove the ADB bearing sensor probe from the housing and insert it into the heater block. As the heater block reaches the alarm temperature, the ADB sensor will relay this data to the control unit, allowing you to verify that the alarm and shutdown sequences run as expected.

#### FEATURES

- ▶ Hand Held Portable Unit
- ▶ Exact Alarm Point Testing
- ▶ Exact Shutdown Point Testing
- ▶ Easy To Read Display

#### PART NUMBERS

- ▶ ADBT1 ADB Bearing Sensor Tester (°F Display)
- ▶ ADBTC1 ADB Bearing Sensor Tester (°C Display)

#### 4B COMPATIBLE SENSORS & ACCESSORIES

- ▶ ADB810V3AI/D2 Adjustable Bearing Temperature Sensor – 50mm Probe
- ▶ ADB810V3AI Adjustable Bearing Temperature Sensor – 100mm Probe
- ▶ ADB810V3AI/D8 Adjustable Bearing Temperature Sensor – 200mm Probe
- ▶ Compatible with all other ADB Series Bearing Temperature Sensors from 4B Components





ADB Hand Held Test Unit

# ADB Bearing Sensor Tester

BETTER BY DESIGN

## DIMENSIONS

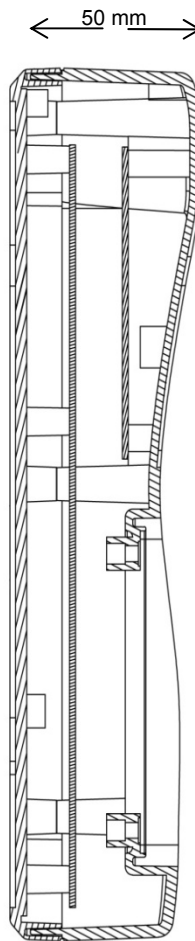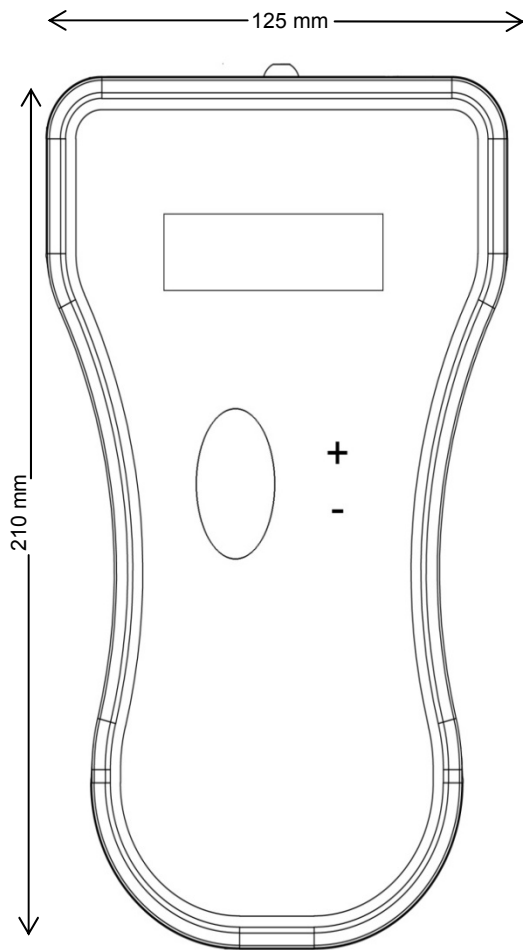

## TECHNICAL SPECIFICATIONS

ADB Bearing Temperature Tester	
Supply 1 (Heater Block)	Four - AA Batteries (Rechargeable NiMH Recommended)
Supply 2 (Display)	Two - 9 Volt Batteries (Rechargeable NiMH Recommended)
Temperature Control Range	Ambient to 230°F (ADBT1) or 110°C (ADBTC1)
Temperature Control Resolution	10°F (ADBT1) or 5°C (ADBTC1)
Display	Green LED Display Showing Testing Set Temperature
Power On / Off	The Unit Is Powered On / Off By The Top Mounted Switch

Information subject to change or correction. Jan 2013